


X01 HD

Installation Instructions

HD Fixture Connector

- 1** Unscrew 2 setscrews on opposite side of stem.
- 2** Place connector on rails in desired location.
- 3** Reinsert setscrews and tighten until fixture is securely fastened.

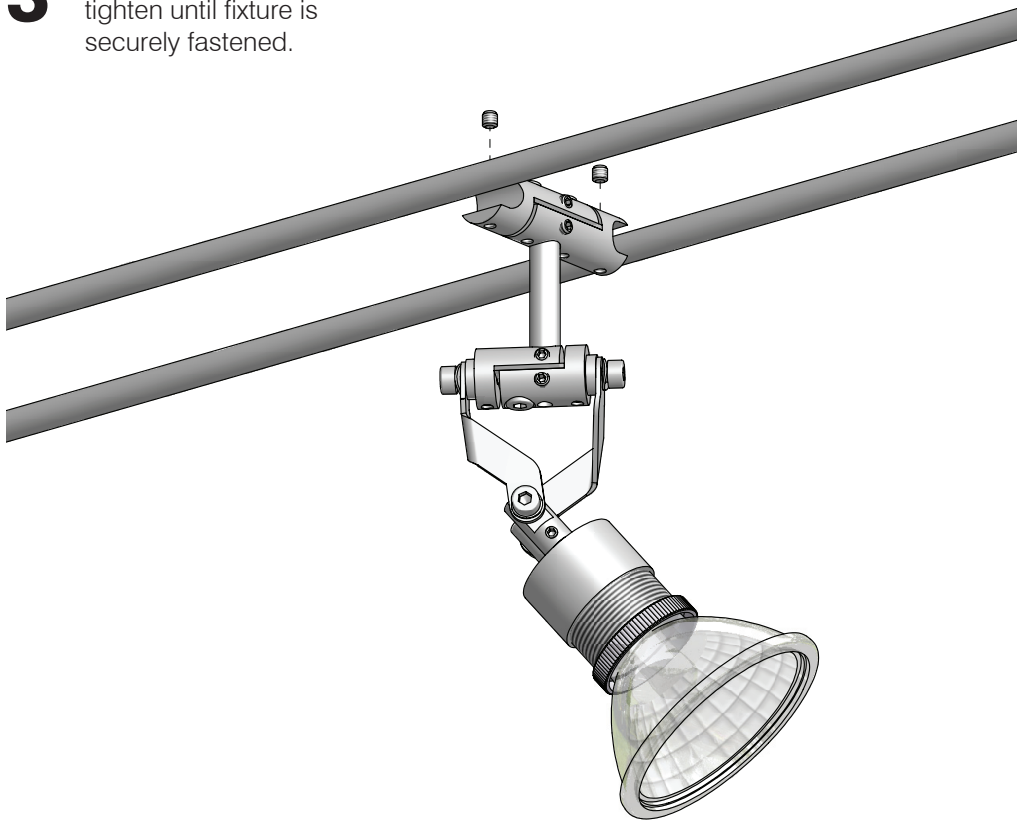

CAUTION

- Read all instructions.
- Do not move fixture along rail while power is on.
- Ensure connection is tight to prevent short circuit from occurring.
- Do not over tighten screws, rails could collapse with extreme force.
- Leave system on to test installation for 20-30 minutes. Heat indicates a loose connection. Check if any connections on the system are warmer than your body temperature. If a connection is very warm, turn off system and retighten that connection.
- Keep this document as a reference.