




# L195

- Application** Interior pendant.
- IP rating** -
- Mounting** Retrofit to existing standard octagonal box using custom mounting plate (included)
- Electrical** 1W / 2.5W  
3V DC (driver not included)
- Power** 1.0 Watt
- Consumption** 2.5 Watt
- Light Output** 1.0 Watt, 46.76~55.9lm  
2.5 Watt, 89.7~98.8lm
- Warranty** 5 years limited warranty  
Estimated useful life of LED is 50,000 hours.
- Material** Anodized aluminum. RoHS compliant.
- Weight** 1.5lbs (0.7kg)
- Approval** 

**Type:**

**Project:**

**Modified:**

**Quantity:**

**Notes:**


## Order Guide

Example: L195-C1M-1-1-W27S-S-C72-BA

Code	Mount	Wattage	Length	Color	Beam	Cord	Finish
<b>L195</b>		-	-			-	
	<b>C1M</b> = Ø2-3/8" x 1/4" canopy, retrofit mounting plate <b>C3</b> = Ø4-5/8" x 1/4" canopy <b>C4</b> = 4-5/8" Sq. x 1/4" canopy <b>SRB</b> = single rail black	<b>1</b> = 1W <b>2</b> = 2.5W	<b>1</b> = 1' <b>2</b> = 2' <b>4</b> = 4' <b>6</b> = 6'	<b>W22S</b> = 2200K, 80+CRI <b>W27S</b> = 2700K, 80+CRI <b>W30S</b> = 3000K, 80+CRI <b>W35S</b> = 3500K, 80+CRI <b>W41S</b> = 4100K, 80+CRI <b>W27H</b> = 2700K, 90+CRI <b>W30H</b> = 3000K, 90+CRI <b>W35H</b> = 3500K, 90+CRI	<b>S</b> = spot (12°) <b>N</b> = narrow flood (30°)	<b>C72</b> = 72" (1829mm) cord <b>CX</b> = custom cord  <i>* available in 1" (25mm) increments up to 20' (6.1m) max.</i>	<b>BA</b> = black anodized <b>WH</b> = white powder coating

\* W20S AC only  
\*W22S DC only

**Dimension**

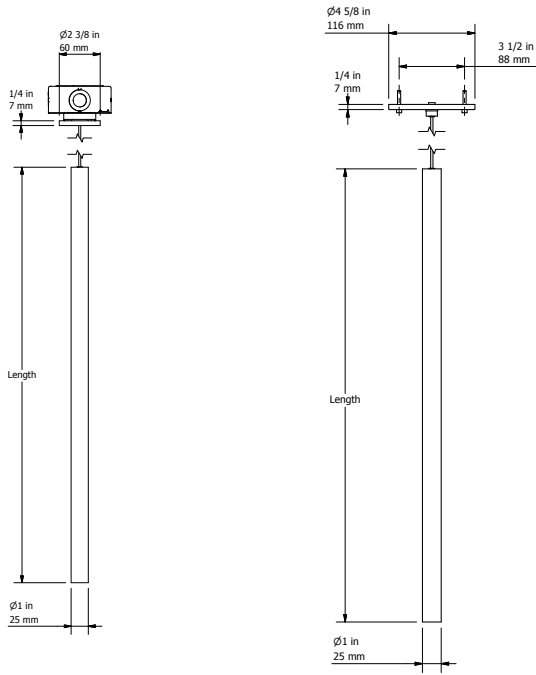

C1M canopy

C3 canopy

**PHOTOMETRIC DATA:**

**1W, 3000K, 80+CRI**

**2.5W, 3000K, 80+CRI**

**Polar Candela Distribution**


**Illuminance at a Distance**

**Polar Candela Distribution**

**Illuminance at a Distance**


Lumen: 46.76lm (12°)

Lumen: 89.7lm (12°)



	Center Beam FC	Beam Width
1.0'	242	0.4' (121mm)
2.0'	60.4	0.7' (213mm)
3.0'	26.8	1.1' (335mm)
4.0'	15.1	1.4' (426mm)
5.0'	9.66	1.8' (548mm)
6.0'	6.71	2.1' (640mm)

0° Spread: 19.9°



	Center Beam FC	Beam Width
1.0'	444	0.4' (121mm)
2.0'	111	0.7' (213mm)
3.0'	49.4	1.1' (335mm)
4.0'	27.8	1.4' (426mm)
5.0'	17.8	1.8' (548mm)
6.0'	12.3	2.1' (640mm)

0° Spread: 19.9°

**Polar Candela Distribution**


**Illuminance at a Distance**

**Polar Candela Distribution**

**Illuminance at a Distance**


Lumen: 55.9lm (30°)

Lumen: 98.8 (30°)



	Center Beam FC	Beam Width
1.0'	201	0.5' (152mm)
2.0'	50.3	1.0' (304mm)
3.0'	22.3	1.5' (457mm)
4.0'	12.6	2.0' (609mm)
5.0'	8.04	2.5' (762mm)
6.0'	5.59	3.0' (914mm)

0° Spread: 28.3°



	Center Beam FC	Beam Width
1.0'	355	0.5' (152mm)
2.0'	88.8	1.0' (304mm)
3.0'	39.5	1.5' (457mm)
4.0'	22.2	2.0' (609mm)
5.0'	14.2	2.5' (762mm)
6.0'	9.87	3.0' (914mm)

0° Spread: 28.3°