



L195

Application Interior pendant for lighting walls, columns, architectural features or landscape features.
For dry locations only.
Recommended Projects - Commercial, Institutional, Retail, Religious, Educational, Architecture

IP rating -
Mounting Retrofit to existing standard octagonal box using custom mounting plate (included)

Electrical 1W / 2.5W
3V DC (driver not included)


Power 1.0 Watt
Consumption 2.5 Watt

Light Output 1.0 Watt, 46.76~55.9lm
2.5 Watt, 89.7~98.8lm

Warranty 5 years limited warranty
Estimated useful life of LED is 50,000 hours.

Material Anodized aluminum. RoHS compliant.

Weight 1.5lbs (0.7kg)

Approval 

DISCLAIMER Malfunction and damage to product due to improper dimming system installation or misuse will not be covered under warranty. Only DC Drivers are recommended for dimming systems. Consult MP Lighting for recommended drivers.

*MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products.

Type:

Project:

Modified:

Quantity:


Notes:

Order Guide

Example: L195-C1M-1-1-W27S-S-C72-BA

Code	Mount	Wattage	Length	Color	Beam	Cord	Finish
L195		-	-			-	
	C1M = Ø2-3/8" x 1/4" canopy, retrofit mounting plate C3 = Ø4-5/8" x 1/4" canopy C4 = 4-5/8" Sq. x 1/4" canopy SRB = single rail black	1 = 1W 2 = 2.5W	1 = 1' 2 = 2' 4 = 4' 6 = 6'	W22S = 2200K, 80+CRI W27S = 2700K, 80+CRI W30S = 3000K, 80+CRI W35S = 3500K, 80+CRI W41S = 4100K, 80+CRI W27H = 2700K, 90+CRI W30H = 3000K, 90+CRI W35H = 3500K, 90+CRI	S = spot (12°) N = narrow flood (30°)	C72 = 72" (1829mm) cord CX = custom cord * available in 1"(25mm) increments up to 20' (6.1m) max.	BA = black anodized WH = white powder coating

Dimension

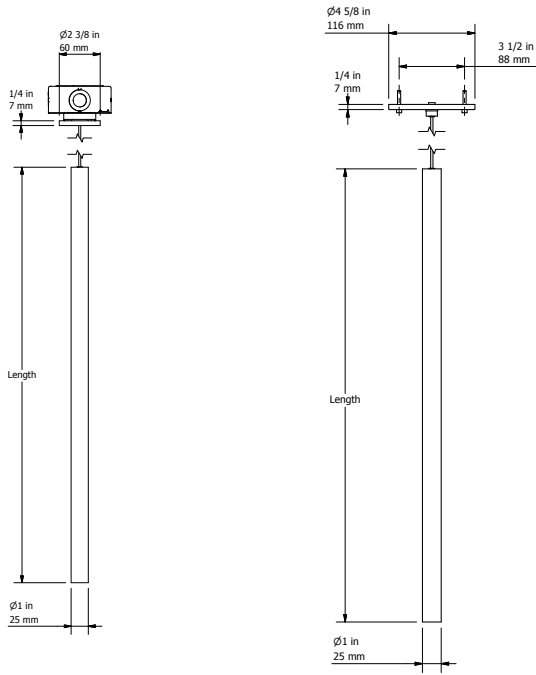

C1M canopy

C3 canopy

PHOTOMETRIC DATA:

1W, 3000K, 80+CRI

2.5W, 3000K, 80+CRI

Polar Candela Distribution


Illuminance at a Distance

Polar Candela Distribution

Illuminance at a Distance


Lumen: 46.76lm (12°)

Lumen: 89.7lm (12°)



	Center Beam FC	Beam Width
1.0'	242	0.4' (121mm)
2.0'	60.4	0.7' (213mm)
3.0'	26.8	1.1' (335mm)
4.0'	15.1	1.4' (426mm)
5.0'	9.66	1.8' (548mm)
6.0'	6.71	2.1' (640mm)

0° Spread: 19.9°



	Center Beam FC	Beam Width
1.0'	444	0.4' (121mm)
2.0'	111	0.7' (213mm)
3.0'	49.4	1.1' (335mm)
4.0'	27.8	1.4' (426mm)
5.0'	17.8	1.8' (548mm)
6.0'	12.3	2.1' (640mm)

0° Spread: 19.9°

Polar Candela Distribution


Illuminance at a Distance

Polar Candela Distribution

Illuminance at a Distance


Lumen: 55.9lm (30°)

Lumen: 98.8 (30°)



	Center Beam FC	Beam Width
1.0'	201	0.5' (152mm)
2.0'	50.3	1.0' (304mm)
3.0'	22.3	1.5' (457mm)
4.0'	12.6	2.0' (609mm)
5.0'	8.04	2.5' (762mm)
6.0'	5.59	3.0' (914mm)

0° Spread: 28.3°



	Center Beam FC	Beam Width
1.0'	355	0.5' (152mm)
2.0'	88.8	1.0' (304mm)
3.0'	39.5	1.5' (457mm)
4.0'	22.2	2.0' (609mm)
5.0'	14.2	2.5' (762mm)
6.0'	9.87	3.0' (914mm)

0° Spread: 28.3°