




L195

- Application** Interior pendant
Recommended Projects - Commercial, Institutional, Residential, Retail, Religious, Educational, Architecture
- IP rating** 20 (For dry locations only).
- Mounting** Retrofit to existing standard octagonal box using custom mounting plate (included)
- Electrical** 1W / 2.5W
3V DC (driver not included)
- Power Consumption** 1.0 Watt
2.5 Watt
- Light Output** 1.0 Watt, 46.76~55.9lm
2.5 Watt, 89.7~98.8lm
- Warranty** 5 years limited warranty
Estimated useful life of LED is 50,000 hours.
- Material** Anodized aluminum. RoHS compliant.
- Weight** 1.5lbs (0.7kg)
- Approval** 

DISCLAIMER If the fixture has an option to be installed with a dimming control system, consult dimming system manufacturer with minimum load before installing 12V AC transformer.

Malfunction and damage to product due to improper dimming system installation or misuse will not be covered under warranty. Only DC Drivers are recommended for dimming systems. Consult MP Lighting for recommended drivers.

*MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products.v

Type:

Project:

Modified:

Quantity:


Notes:

Order Guide


Example: L195-C1M-1-1-W27S-S-C72-BA

Code	Mount	Wattage	Length	Color	Beam	Cord	Finish
L195		-	-			-	
	C1M = Ø2-3/8" x 1/4" canopy, retrofit mounting plate C3 = Ø4-5/8" x 1/4" canopy C4 = 4-5/8" Sq. x 1/4" canopy SRB = single rail black	1 = 1W 2 = 2.5W	1 = 1' 2 = 2' 4 = 4' 6 = 6'	W22S = 2200K, 80+CRI W27S = 2700K, 80+CRI W30S = 3000K, 80+CRI W35S = 3500K, 80+CRI W41S = 4100K, 80+CRI W27H = 2700K, 90+CRI W30H = 3000K, 90+CRI W35H = 3500K, 90+CRI	S = spot (12°) N = narrow flood (30°)	C72 = 72" (1829mm) cord CX = custom cord <i>* available in 1" (25mm) increments up to 20' (6.1m) max.</i>	BA = black anodized WH = white powder coating

Dimension



C1M canopy

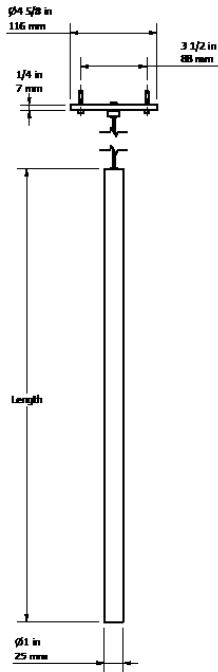


C3 canopy

PHOTOMETRIC DATA:

1W, 3000K, 80+CRI

Polar Candela Distribution

Lumen: 46.76lm (12°)



Illuminance at a Distance


	Center Beam FC	Beam Width
1.0'	242	0.4' (121mm)
2.0'	60.4	0.7' (213mm)
3.0'	26.8	1.1' (335mm)
4.0'	15.1	1.4' (426mm)
5.0'	9.66	1.8' (548mm)
6.0'	6.71	2.1' (640mm)

0° Spread: 19.9°

2.5W, 3000K, 80+CRI

Polar Candela Distribution

Lumen: 89.7lm (12°)




Illuminance at a Distance

	Center Beam FC	Beam Width
1.0'	444	0.4' (121mm)
2.0'	111	0.7' (213mm)
3.0'	49.4	1.1' (335mm)
4.0'	27.8	1.4' (426mm)
5.0'	17.8	1.8' (548mm)
6.0'	12.3	2.1' (640mm)

0° Spread: 19.9°

Polar Candela Distribution

Lumen: 55.9lm (30°)




Illuminance at a Distance

	Center Beam FC	Beam Width
1.0'	201	0.5' (152mm)
2.0'	50.3	1.0' (304mm)
3.0'	22.3	1.5' (457mm)
4.0'	12.6	2.0' (609mm)
5.0'	8.04	2.5' (762mm)
6.0'	5.59	3.0' (914mm)

0° Spread: 28.3°

Polar Candela Distribution

Lumen: 98.8 (30°)



Illuminance at a Distance

	Center Beam FC	Beam Width
1.0'	355	0.5' (152mm)
2.0'	88.8	1.0' (304mm)
3.0'	39.5	1.5' (457mm)
4.0'	22.2	2.0' (609mm)
5.0'	14.2	2.5' (762mm)
6.0'	9.87	3.0' (914mm)

0° Spread: 28.3°