





L198-L191

- Application** Exterior Pendant for use in open space with high ceiling or where higher light levels are required.
- IP Rating** 62
- Mounting** Mounts to C3 Canopy or using a plug & socket clip connector with turn buckle (not included)
*For more information consult with factory or see installation guide
- Electrical** 0.26W (80mA LEDs)
DC - Powered by remote 120V primary, 700mA driver (not included). Recommended LED10W350D. Dimmable driver available. Consult factory.
24V DC
- Power Consumption** 8W
- Light Output** 8W - 433lm
- Warranty** 5 years limited warranty
Estimated useful life of LED is 50,000 hours.
- Material** PMMA
- Weight** 1.5lbs (0.7kg)
- Approval**  

Type:

Project:

Modified:

Quantity:


Notes:

Order Guide

Example: L198-L191-C3-2-W30S-S6-MA

Code	Mount	Length	Color	Stem / Cord	Finish
L198-L191	-	-	-	-	-
	PS = Plug & socket clip connector w/ Turn buckle C3 = Ø4-5/8" x 1/4" canopy	2 = 2' 4 = 4'	W22S = 2200K, 80+CRI W27S = 2700K, 80+CRI W30S = 3000K, 80+CRI W35S = 3500K, 80+CRI <i>(W35S available upon request)</i>	S6 = 6" (152mm) stem SX = custom stem* C72 = 72" (1829mm) cord CX = custom cord <i>* available in 1" (25mm) increments up to 8ft (2439mm) max.</i>	MA = matte clear anodized

Dimension:

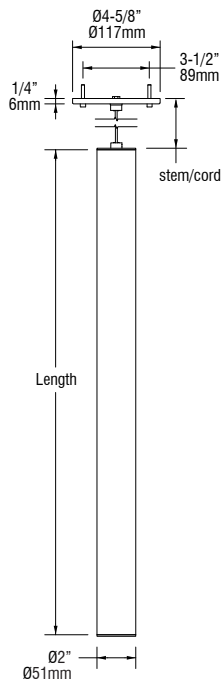


PHOTOMETRIC DATA:

8W, 2700K 90+CRI, 19°

Polar Candela Distribution

Illuminance at a Distance

Lumen: 433 lm



	Center Beam FC	Beam Width
3.0'	328	1.0'
6.0'	81.9	2.1'
9.0'	36.4	3.1'
12'	20.5	4.1'
15'	13.1	5.2'
18'	9.10	6.2'

0° Spread: 19.5°