

L600C14

- Application** Exterior/Interior pendant
- IP Rating** 42
- Mounting** Mounts to standard 4" octagonal box comes with standard 72" (1829mm) field adjustable coaxial cable or 6" (152mm) stem. Longer custom length available.
- Electrical** Integral driver (standard) Input - 120V AC (Triac).
Integral driver(standard) Input - 120/277V AC (0-10V).
Remote driver option (Lutron, DMX, or DALI.)
- Power Consumption** 13.0 Watt
- Light Output** 13.0 Watt, 1044~1080lm
**For photometric data, see page 03*
- Warranty** 5 years limited warranty
Estimated useful life of LED is 50,000 hours.
- Material** Anodized aluminum. RoHS compliant
- Weight** 2lbs (0.907kg)
- Approval**

Type:

Project:

Modified:

Quantity:

Notes:

- Emergency Driver options(remote)** MP Lighting Emergency Backup Unit.
Input: 100-277V, 50/60Hz Output: 11-36V, 16W


Bodine Emergency Micro Inverter
Input: 120/277V, 50/60HZ Output: 120/277V, 60Hz, 20W

Order Guide

Example: L600-C14-13-W30-S-N-S-1-S6-MA


Code	Canopy	Wattage	Color	CRI	Beam	Reflector Color	Input Voltage	Cord/stem	Finish
L600	C14	- 13						-	
<p>C14 = 04-5/8" (116mm) x 1-7/8" (48mm)</p> <p>13 = 13W</p> <p>W27 = 2700K W30 = 3000K W35 = 3500K HG = halogen dim (2000K~2800K)</p> <p>S = 80+ std CRI V = 97+ CRI <i>*97+ CRI only available for W27/ W30</i></p> <p>S = spot (10°) N = narrow flood (30°) F = flood (40°)</p> <p><i>(see below)</i></p> <p>1 = 120V 2 = 277V <i>** Input Voltage</i> <i>1 = 120V Input integral driver. Phase dimmable.</i> <i>2 = 120-277V Universal input voltage. 0-10V dimmable.</i></p> <p>S6 = 6" (152mm) stem SX = custom stem* C72 = 72" (1829mm) cord CX = custom cord <i>* available in 1" increments up to 8ft max.</i></p> <p>MA = matte clear anodized BA = black anodized BZ = bronze anodized WH = white powder coating</p> <p><i>Option</i> -----</p> <p>BZ= bronze specular S = silver specular B = black specular</p>									

DIMENSION:

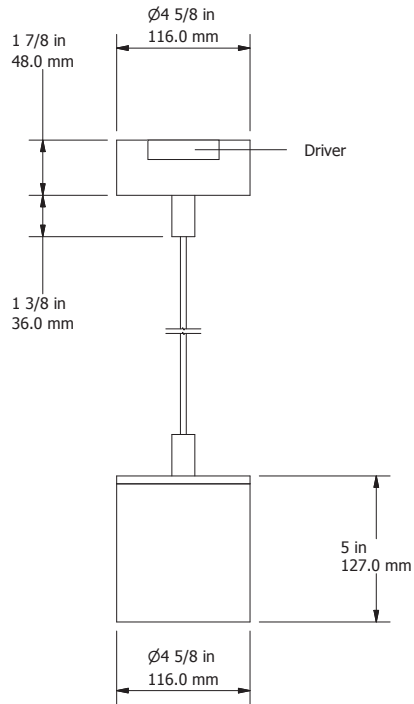


LIGHT DISTRIBUTION:


13WATT



10° (Spot beam)
Matte clear anodized



30° (Narrow Flood beam)
Matte clear anodized



40° (Flood beam)
Matte clear anodized


PHOTOMETRIC DATA:

13W 3000K 80+CRI

Polar Candela Distribution

Illuminance at a Distance


Lumen: 1050lm, Spot (10°)



	Center Beam FC	Beam Width
3.0'	1012.1	0.8'
6.0'	253.0	1.6'
9.0'	112.5	2.5'
12.0'	63.3	3.1'
15.0'	40.5	3.9'
18.0'	28.1	4.7'

0° Spread: 14.8°


Lumen: 1044lm, Narrow flood (30°)



	Center Beam FC	Beam Width
3.0'	295.6	1.6'
6.0'	73.9	3.3'
9.0'	32.8	4.9'
12.0'	18.5	6.6'
15.0'	11.8	8.2'
18.0'	8.2	9.8'

0° Spread: 30.5°

Lumen: 1080lm, Flood (40°)



	Center Beam FC	Beam Width
3.0'	239.4	2.1'
6.0'	59.8	4.2'
9.0'	26.6	6.3'
12.0'	15.0	8.4'
15.0'	9.6	10.5'
18.0'	6.6	12.6'

0° Spread: 38.6°