





1W / 2.5W Picture Light


L81CB

SPEC SHEET

Shown as 12° or 30° beam, S5" (127mm) straight stem

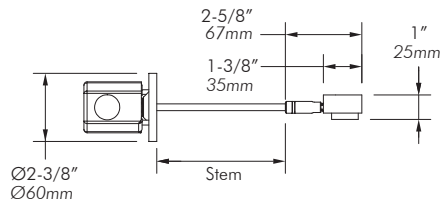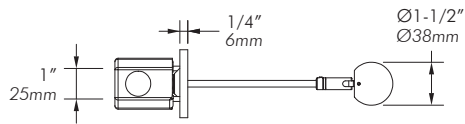

Shown as 120° beam, C10" (254mm) curved stem

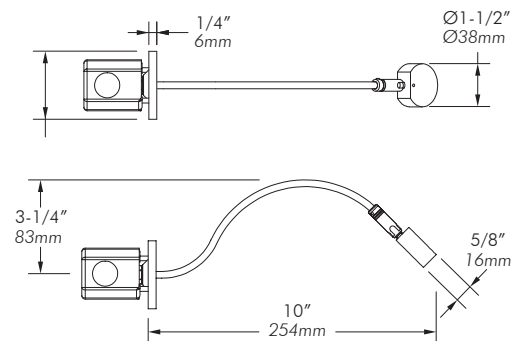

Application: Indoor picture or millwork illumination.

Electrical: 1W, 350mA or 2.5W, 700mA LED. Powered by remote 120V or 277V primary, 350mA (1W) or 700mA (2.5W) driver (not included).

LED Input Voltage: 4V DC

Power Consumption: 1.5W / 3W

Recommended Driver: LED8W350L (1W) or LED17W700D (2.5W).

Dimmable drivers available (not included). Consult factory.

Weight: 0.86lbs (0.392kg) with S5 straight stem.

Material: Plated brass. RoHS compliant.

Mounting: Ceiling or wall mount to custom 2" x 2" octagonal box (CB) (included).

Approval: Dry locations. Approved to US and Canadian standards by CSA.



Type:

Project:

Modified:

Quantity:

Notes: PLEASE READ - When using a control system, consult dimming system manufacturer with minimum load before installing 12V AC transformer. Malfunction and damage to product due to improper dimming system installation or misuse will not be covered under warranty. Only DC Drivers are recommended for dimming systems. Consult MP Lighting for recommended drivers.

Order Guide

Example: L81-CB-1-W27S-S-S5-MC

CODE	MOUNT	WATTAGE	COLOR	BEAM	STEM	FINISH
L81	CB	-			-	
	CB = custom octagonal box	1 = 1W 2 = 2.5W*	W27S = 2700K, std CRI W30S = 3000K, std CRI W35S = 3500K, std CRI W41S = 4100K, std CRI W20H = 2000K, high CRI W30H = 3000K, high CRI	S = spot (12°) N = narrow flood (30°) W = wide flood (120°)	S5 = 5" (127mm) straight stem S10 = 10" (254mm) straight stem SX = custom straight stem C10 = 10" (254mm) curved stem CX = custom curved stem	MC = matte chrome

*Only available in W30S & W20H.

Note: Standard CRI has a value of 75~82 while high CRI has 92.

W20H has consistent binning that falls within 1.5 MacAdam ellipse.

MP LIGHTING

t1.877.708.1184 f604.708.1185 www.mplighting.com
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada

L81CB


SPEC SHEET

Lumen test results provided
by LED chip manufacturer

Photometric Data

L81
1W, 12°
3000K Std
85 lm

Polar Candela Distribution




Illuminance at a Distance

	Center Beam FC	Beam Width
0.3'	6,846.22	0.1' 0.1'
0.7'	1,711.56	0.2' 0.2'
1.0'	760.67	0.2' 0.3'
1.3'	427.89	0.3' 0.3'
1.7'	273.85	0.4' 0.4'
2.0'	190.17	0.5' 0.5'

0° Spread: 13.8° 90° Spread: 14.9°

L81
1W, 30°
3000K Std
85 lm

Polar Candela Distribution




Illuminance at a Distance

	Center Beam FC	Beam Width
0.3'	2,632.25	0.2' 0.2'
0.7'	658.06	0.3' 0.3'
1.0'	292.47	0.5' 0.5'
1.3'	164.52	0.6' 0.7'
1.7'	105.29	0.8' 0.8'
2.0'	73.12	0.9' 1.0'

0° Spread: 25.5° 90° Spread: 27.5°

L81
1W, 120°
3000K Std
85 lm

Polar Candela Distribution




Illuminance at a Distance

	Center Beam FC	Beam Width
0.3'	278.73	0.9' 0.8'
0.7'	69.68	1.7' 1.7'
1.0'	30.97	2.6' 2.5'
1.3'	17.42	3.4' 3.4'
1.7'	11.15	4.3' 4.2'
2.0'	7.74	5.1' 5.0'

0° Spread: 103.9° 90° Spread: 103.0°

L81
2.5W, 12°
3000K Std
162 lm

Polar Candela Distribution



Illuminance at a Distance

	Center Beam FC	Beam Width
0.3'	13,048	0.1' 0.1'
0.7'	3,262	0.2' 0.2'
1.0'	1,450	0.2' 0.3'
1.3'	815.51	0.3' 0.3'
1.7'	521.92	0.4' 0.4'
2.0'	362.45	0.5' 0.5'

0° Spread: 13.8° 90° Spread: 14.9°



t 1.877.708.1184 f 604.708.1185 www.mplighting.com
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada

Note: Various operating factors may cause differences between lab and field results. As specifications may change without notice, please refer to the LED Lamp Index located in the "Downloads" section of each product webpage for the most current information.

L81CB


SPEC SHEET

Lumen test results provided by LED chip manufacturer

Photometric Data

L81
2.5W, 30°
3000K Std
162 lm

Polar Candela Distribution




Illuminance at a Distance

	Center Beam FC	Beam Width	
0.3'	5,017	0.2'	0.2'
0.7'	1,254	0.3'	0.3'
1.0'	557.42	0.5'	0.5'
1.3'	313.55	0.6'	0.7'
1.7'	200.67	0.8'	0.8'
2.0'	139.35	0.9'	1.0'

0° Spread: 25.5° 90° Spread: 27.5°

L81
2.5W, 120°
3000K Std
162 lm

Polar Candela Distribution



Illuminance at a Distance

	Center Beam FC	Beam Width	
0.3'	490.51	0.9'	0.8'
0.7'	122.63	1.7'	1.7'
1.0'	54.50	2.6'	2.5'
1.3'	30.66	3.4'	3.4'
1.7'	19.62	4.3'	4.2'
2.0'	13.63	5.1'	5.1'

0° Spread: 104 90° Spread: 103.5°