

L49

Adjustable Wall Mount



L49

Adjustable Wall Mount


Rough In Parts

- LED unit — x 1
- Electrical box — x 1
- Trim head screws — x 4 not included
- Mounting block — not included
- Materials to seal box — not included (foam or tape)


Surface Mount Rough In

- For outdoor applications or cast in concrete use appropriate enclosure compatible with local electrical code.
- Use 3-1/2" deep x 7-3/8" wide x 3-3/4" high, 4 gang masonry box. MP box EBX1-L49-SS or standard box (ex. Iberville, CIMBD-4-K).


- 1) Install wiring and position conduit on left or right side of the box only.
- 2) Position electrical box to ensure it is level before concrete is poured. Box should be no lower than 1-3/4" from the finished floor.
- 3) Take appropriate steps to support box from collapsing and prevent concrete from entering box during concrete pour.
- 4) If using a support such as a mounting block (not included), secure in place with 2 trim head wood screws through each side of the box. Trim head screws (not included) can be pulled out after concrete has cured.

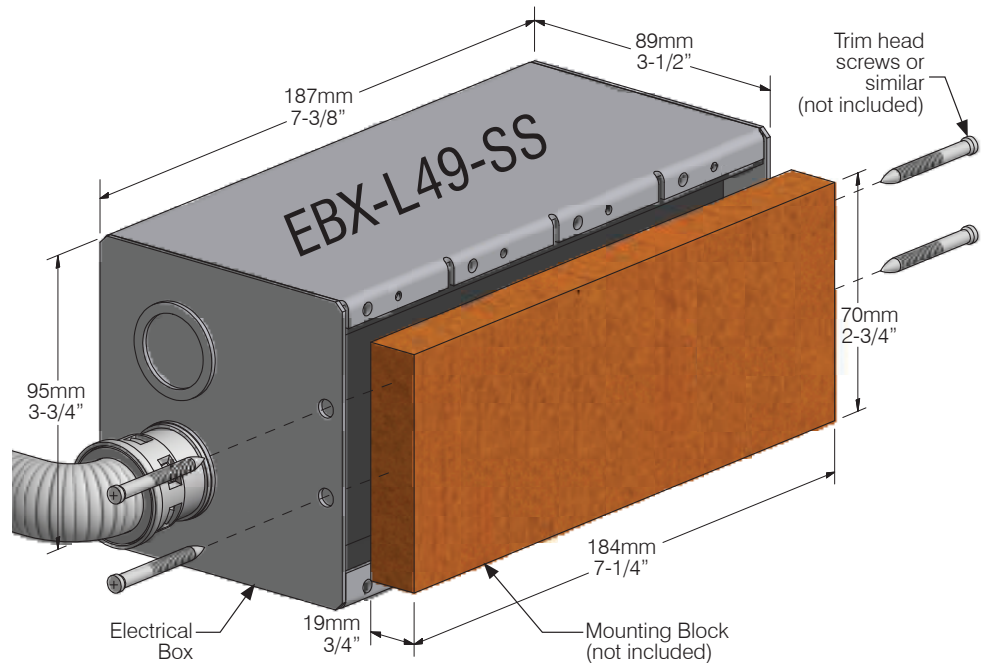

Minimum Distance to Finished Floor

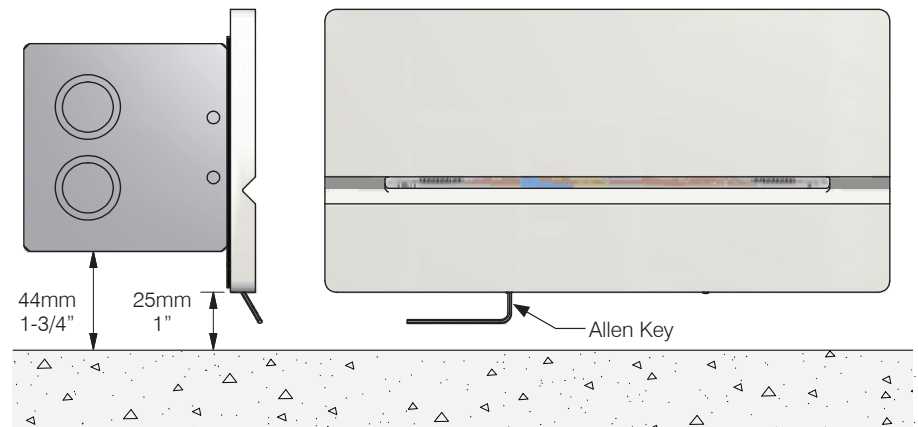

Section View

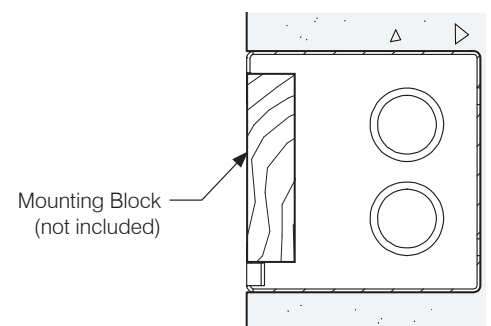

L49

Adjustable Wall Mount



Install Light Fixture

- 1) After concrete has cured remove forms and prepare box for fixture installation.
- 2) Connect fixture leads to box wiring using supplied waterproof wire nuts. Line voltage power must be off before connecting driver.
- 3) Make sure bracket angle is lined up in desired direction and beam position or adjust accordingly.
- 4) Align back plate to electrical box and attach with four screws (included).
- 5) Mount cover plate to back plate hooking the top of the plate on first then secure by tightening two set screws with provided allen key.
- 6) Optional: Apply weather proof bead of silicone on 3 sides of gasket (top and both sides).

Parts

- LED unit — x 1
- Cover plate — x 1
- Electrical box — x 1
- Mounting screws — x 4
- Set screws — x 2
- Allen key — x 1
- Waterproof wire nuts — x 2

Minimum Distance to Finished Floor

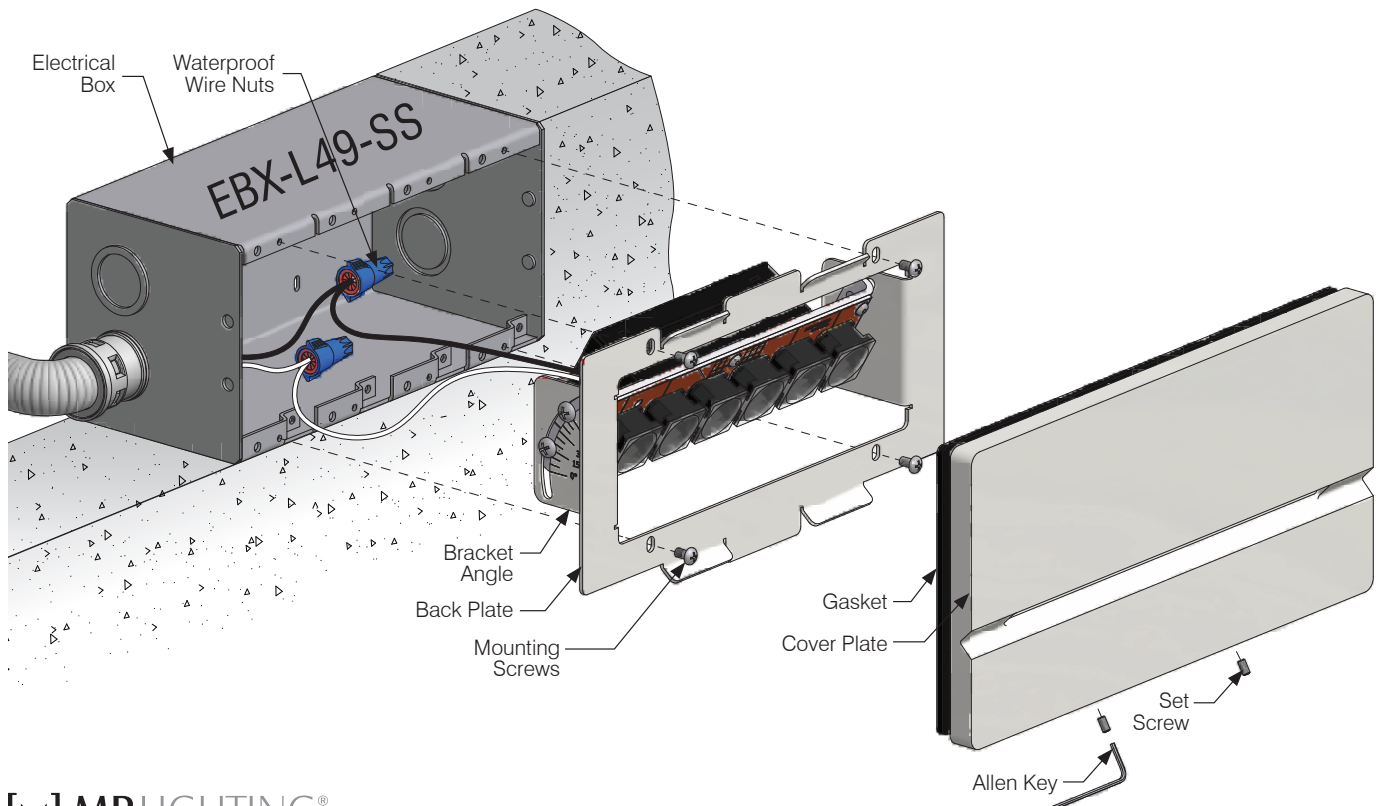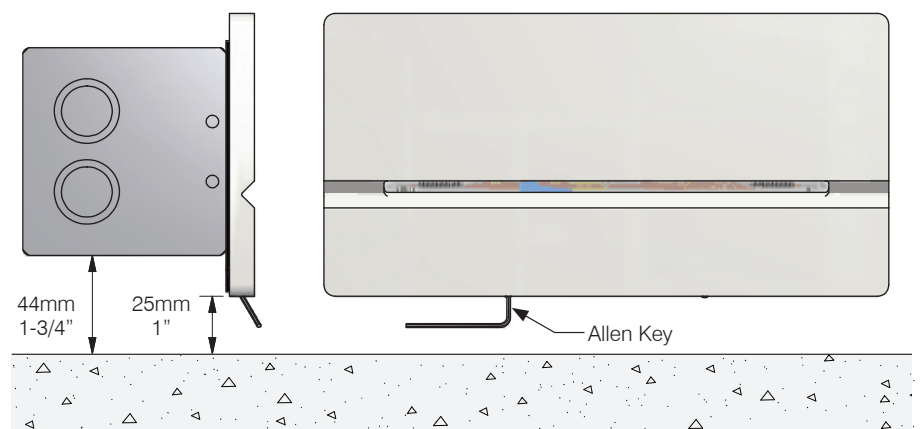

MP LIGHTING®

www.mplighting.com | 1.877.708.1184 | 604.708.1185

All technical information in this document is subject to change. Copyright © MP Lighting.

07-2019

IMPORTANT SAFETY INSTRUCTIONS

KEEP THESE INSTALLATION INSTRUCTIONS

(Including General and Additional Markings for Fixtures)

(FOR MP LIGHTING LED LUMINAIRES, CLASS 3402-xx)

General and additional markings

1. For Use Only with Certified/NRTL Driver, Model _____
2. DRY LOCATIONS ONLY or OUTDOOR USE ONLY or DRY/
OUTDOOR USE ONLY or Outdoor / submersible Use Only - as
indicated on fixtures
3. MIN 90 C SUPPLY CONDUCTORS
4. Model L92: SUITABLE FOR MOUNTING WITHIN 1.2 M (4FT) OF
THE GROUND
5. Models L01, L03, L04, L05, L06, and L07: SUITABLE FOR USE IN
POURED CONCRETE, USE ON CLASS 2 CIRCUIT ONLY
6. Models with Class 2 LED Drivers which are intended for
installation for other than Indoor Use Only: CAUTION:
CONNECTED ONLY TO A CIRCUIT PROTECTED BY A CLASS A
GROUND FAULT CIRCUIT INTERRUPTER

Installation instructions

1. The grounding installation shall be done in accordance with
CEC-Part 1.
2. WARNING: RISK OF FIRE OR ELECTRIC SHOCK: DO NOT
MAKE OR ALTER ANY OPENINGS IN THE COMPARTMENT
OF WIRING OR ELECTRICAL COMPONENTS DURING
INSTALLATION. DO NOT ALTER OR ADD BALLASTS, OR ANY
OTHER ELECTRICAL COMPONENTS.
3. INSTALLATION AND USE OF THIS FIXTURE MOUNTING
ASSEMBLY REQUIRES A PERSON FAMILIAR WITH THE
CONSTRUCTION AND OPERATION OF LUMINAIRE
ELECTRICAL SYSTEMS AND THE HAZARD INVOLVED, IF NOT
QUALIFIED, DO NOT ATTEMPT INSTALLATION. CONTACT A
QUALIFIED ELECTRICIAN.
4. TURN OFF POWER BEFORE INSTALLATION.
5. KEEP THESE INSTALLATION INSTRUCTIONS.

CONSIGNES DE SÉCURITÉ IMPORTANTES

CONSERVER CES INSTRUCTIONS D'INSTALLATION

(Dont le général et marques supplémentaires pour les appareils)

(Pour les luminaires LED MP D'ÉCLAIRAGE , CLASS 3402 -xx)

Général et marquages supplémentaires

1. A utiliser uniquement avec Certified / NRTL pilote, modèle _____
2. POUR EMPLACEMENTS SECS SEULEMENT ou UTILISATION
EXTÉRIEURE SEULEMENT ou SEC / UTILISATION EXTÉRIEURE
SEULEMENT ou extérieure / Utilisation submersible seulement -
comme indiqué sur les appareils
3. LES FILS D'ALIMENTATION 90 °C MIN
4. Modèle L92: Pour montage moins de 1,2 m (4 pi) DE LA TERRE
5. Modèles L01, L03, L04, L05, L06, L07 et: utilisables dans le béton
coulé, UTILISATION DE CLASSE 2 CIRCUIT UNIQUEMENT
6. ATTENTION: CONNECTED UNIQUEMENT À UN CIRCUIT
PROTÉGÉ PAR UN DISJONCTEUR DIFFÉRENTIEL DE CLASS A

Les instructions d'installation

1. L'installation de mise à la terre doit être fait en conformité avec
CEC Partie 1.
2. AVERTISSEMENT : RISQUE D'INCENDIE OU
D'ÉLECTROCUTION : NE PAS FAIRE OU MODIFIER DES
OUVERTURES DANS LE COMPARTIMENT DE CÂBLAGE OU
DE COMPOSANTS ÉLECTRIQUES LORS DE L'INSTALLATION.
NE PAS MODIFIER OU AJOUTER DES BALLASTS, OU AUTRES
COMPOSANTS ÉLECTRIQUES
3. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE
D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI
CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT
AINSI QUE LES RISQUES INHÉRENTS. CONSULTER UN
ÉLECTRICIEN QUALIFIÉ.
4. COUPER LE COURANT AVANT L'INSTALLATION.
5. CONSERVEZ CES INSTRUCTIONS.