




L92

- Application** Outdoor walkway and area illumination
- IP Rating** 66
- Mounting** Mounts to 24" (610mm), 36" (614mm) or 48" (1219mm) anodized aluminum post. Comes with 24" (610mm) Cabtire lead inside post.
- Electrical** 2.5W, 700mA LED.
- Power Consumption** 3W (at 700mA, 2.5 watt)
- Light Output** 2.5 Watt, 33~86lm
- Warranty** 5 years limited warranty
Estimated useful life of LED is 50,000 hours.
- Material** Anodized aluminum, insert trim with 1/4" (6mm) thick tempered glass lens. RoHS compliant.
- Weight** 7.15lbs (3.245kg) based on 24" (610mm) post.
- Approval** 

Type:

Project:

Modified:

Quantity:


Notes:

Order Guide

L92-2-W22S-S-C-0-A-24-MA

Code	Wattage	Color	Beam	Lens	Angle Bracket	Input Voltage	Post Height(H)	Finish
L92	2	-	-	-	-	-	-	-
	2 = 2.5W	W20S = 2000K, 80+CRI W22S = 2200K, 80+CRI W27S = 2700K, 80+CRI W30S = 3000K, 80+CRI W35S = 3500K, 80+CRI W41S = 4100K, 80+CRI W27H = 2700K, 90+CRI W30H = 3000K, 90+CRI W35H = 3500K, 90+CRI	S = spot (12°) N = narrow flood (30°) W = wide flood (120°)	C = clear F = frosted	0 = no angle 30 = 30° angle X = custom (30° max)	D = DC <i>*DC not available for W20S</i> A = 12V AC <i>*12V AC not available for W22S/W41S & high CRI</i>	24 = 24" (610mm) 36 = 36" (914mm) 48 = 48" (1219mm)	MA = matte clear anodized
		<i>*W20S AC only</i> <i>*W22S DC only</i>						

Dimension

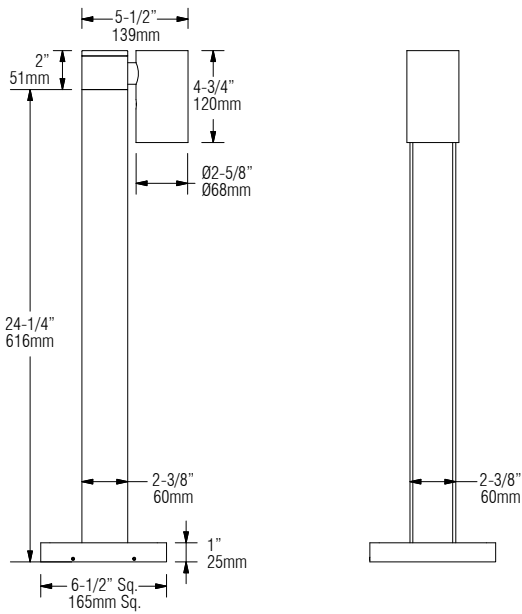

PHOTOMETRIC DATA:

2W, 3000K, 80+ CRI, 30° beam

2W, 3000K, 80+ CRI, 120° beam

Polar Candela Distribution

Illuminance at a Distance

Polar Candela Distribution

Illuminance at a Distance

Lumen: 86lm

Lumen: 33lm

