




Shown with white opalescent glass shade (WH).

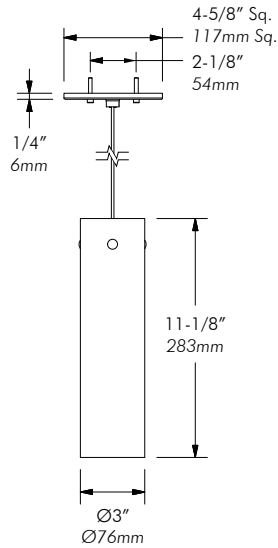

# 6W Glass Pendant

## P81LC4

### SPEC SHEET

**Application:** Interior pendant.

**Glass:** Open top and bottom, cylinder shaped hand blown opalescent cased glass.

**Source:** 6 x 1W, 350mA LEDs.

LED Input Voltage: 12V AC or 24V DC

Power Consumption: 8W

Power Supply: (not included)

**24V DC** - Powered by remote 120V primary, 350mA driver.


Recommended TLDAV100W24V. Dimmable with 100W 24V driver and controller, 0~10V dimming. Consult factory.

**AC** - Powered by remote 120V primary, 12V secondary magnetic transformer. Recommended 12V AC magnetic transformer (not included). Consult factory for dimming option.

**Mounting Material:** Anodized aluminum.

**Mounting:** Mount to standard octagonal box (not included). Standard 72" / 1829mm field adjustable coaxial cable. Longer custom length available.

**Approval:** Dry locations. Approved to US and Canadian standards by CSA.



Type:

Project:

Modified:

Quantity:

Notes:

CODE	MOUNT	SHADE	COLOR	INPUT VOLTAGE	MOUNTING FINISH
P81L	C4	WH			
C4 = 4-5/8" Sq. x 1/4" canopy		WH = white opalescent	W20 = 2000K W27 = 2700K W30 = 3000K W35 = 3500K W41 = 4100K	1A = 12V AC 2D = 24V DC	M = matte clear anodized

**Note:** W20 has consistent binning that falls within 1.5 MacAdam ellipse.



t1.877.708.1184 f604.708.1185 www.mplighting.com  
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada


6W Glass Pendant  
**P81LC4**  
 SPEC SHEET

Lumen test results provided  
 by LED chip manufacturer

**Photometric Data**

**P81L**  
 3000K Std  
 181 lm

**Polar Candela Distribution**



**Illuminance at a Distance**

	Center Beam FC	Beam Width	
0.5'	568	0.3'	0.3'
1.0'	142	0.6'	0.6'
1.5'	63.1	1.0'	0.9'
2.0'	35.5	1.3'	1.3'
2.5'	22.7	1.6'	1.6'
3.0'	15.8	1.9'	1.9'

0° Spread: 35.6°    90° Spread: 35.0°



t 1.877.708.1184 f 604.708.1185 www.mplighting.com  
 16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada

**Note:** Various operating factors may cause differences between lab and field results. As specifications may change without notice, please refer to the LED Lamp Index located in the "Downloads" section of each product webpage for the most current information.