



# P96C1

**Material:** Anodized aluminum. RoHS compliant.

**Mounting:** Retrofit to existing standard octagonal box using custom mounting plate (included).

**Sec. Voltage:** 12V

**Lamp (not included):** MR16 or BI-PIN, 50W max.

**Weight:** 1.87lbs (0.846kg).

**Approval:** Dry locations. Approved to US and Canadian standards by CSA.



**Emergency Driver options (remote):**

MP Lighting Emergency Backup Unit.

Input: 100-277V, 50/60Hz / Output: 11-36V, 16W

Bodine Emergency Micro Inverter

Input: 120/277V, 50/60Hz / Output: 120/277V, 60Hz, 20W

**Type:**


**Project:**

**Modified:**

**Quantity:**

**Notes:**

**Dimension:**

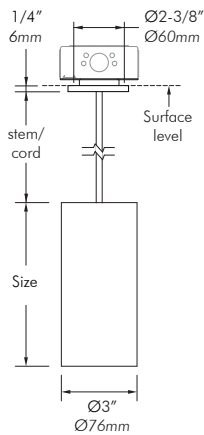

C1M (retrofit mounting plate)

Code	Mount	Size	Pri.Voltage	Stem/Cord	Finish
P96	C1M	-	-	-	-

C1M = Ø2-3/8" x 1/4" canopy w/ retrofit mounting plate

S = 6-3/8" L = 18"

1 = 120V 2 = 277V

\* Note: Large size only available in black, with black cord.

S6 = 6" (152mm) stem  
SX = custom stem  
C72 = 72" (1829mm) cord  
CX = custom cord

MA = matte clear anodized  
BA = black anodized