



SLD-HD

Features:

- Surface mounts to standard junction box.
- Used to power single circuit of system. 100% duty cycle. Integral push button circuit breaker.
- 120V-277V input.
- 15V or 24V output.
- Comes with 15V or 24V LED driver power system (please specify). Also can be used as a power feed for wall mount or sloped ceiling applications, if flexible cord option is chosen.
- Cord cannot be used as a support.
- Consult factory for wiring length and details.
- Dry locations. Approved to UL standards by CSA/US.

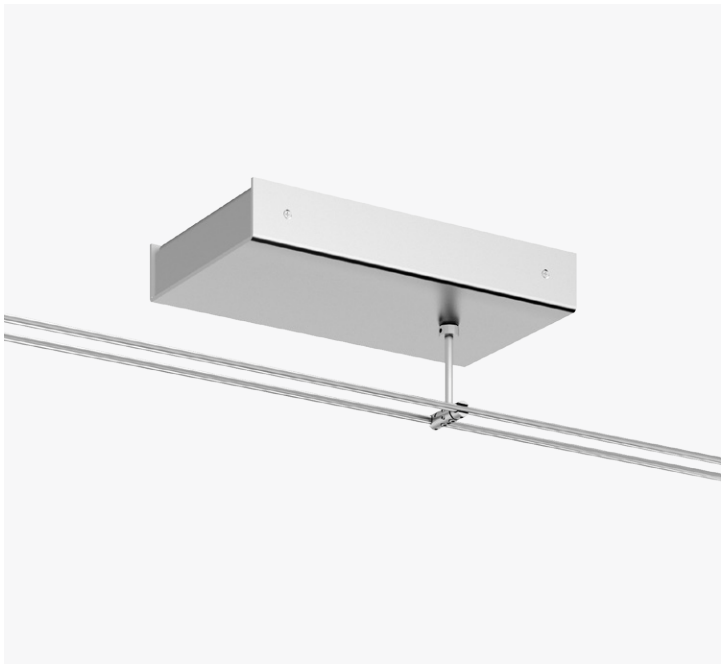

Dimension:

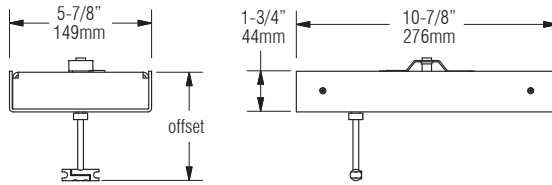

Type:

Project:

Modified:

Quantity:

Notes:

Code	Mount	Wattage	Output Voltage	Dimming	Offset	Finish
SLD	HD	100W				MC

HD = horizontal double rail

100W = 100 watts

15 = 15V DC
24 = 24V DC

D = dimmable
N = non-dimmable

S12 = 12" (305mm)
SX = custom
F15* = 15" (381mm) flexible cord
FX* = custom flexible cord

MC = matte chrome

**For sloped ceiling applications.*