

LED60W12VZ-01

CONSTANT VOLTAGE

60W, 5000mA, 0-10V dimmable, 120-277V AC Input, 50/60Hz

○ Damp, and Dry location



Ordering Information

Clear Form

Date :	_____	Quantity :	_____
Project :	_____	Note :	_____
Type :	_____		_____

Specifications

LED Driver | Example Code: LED60W12VZ-01-B

Product	Enclosure
LED60W12VZ-01	B
	B driver enclosure

Important Notes

Warranty Notes & Disclaimer





MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make improvements and innovations to any of our products. Consult MP Lighting website for further details.

1. Do not install on-off switch at the output (load) side of a constant current LED driver as it will damage the fixture(s) and will void the warranty on both driver and fixture(s).
2. Fixtures must be wired as per MP Lighting's instruction (series wiring for constant current driver and parallel wiring for constant voltage drivers.) Failures due to improper installation will void warranty.

Dimensions

Driver

Enclosure

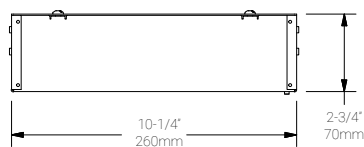

LED60W12VZ-01

CONSTANT VOLTAGE

60W, 5000mA, 0-10V dimmable, 120-277V AC Input, 50/60Hz

○ Damp, and Dry location



Performance

Input	Output	Efficiency
Voltage: 120~277V AC, 50/60 Hz	Voltage: 12V DC	Power Factor: 0.9 minimum.
	Current: 5000mA Constant	Typical Efficiency: 80%
	Wattage: 60W maximum	

Controls

Dimming Protocols	0-10V dimming. Can be used in both dimming & non-dimming systems.
Dimming Range	4%~100%

Recommended Load


Driver Load	1 to 6 7W or 8W LED fixtures, or 1 to 200 0.2W LED fixtures wired in parallel.
-------------	--

Application

Environments	Damp / Dry Location approved.
Ambient Temperature	-20°C (-4°F) minimum.
Case Temperature	80°C (176°F) maximum.
Driver Protection	Short Circuit, Overload & Over-voltage protection.
Weight	400g (0.89lb).
Case Material	Aluminum

Wiring Diagram

Dimming | For use with 1-6 x 7W or 8W LED lighting fixtures, wired in parallel.

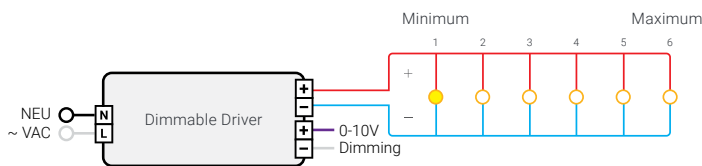

● 8W LED Lighting Fixture