

Low Voltage Cable System

# X01CS

## SPEC SHEET



**Material:** Machined aluminum with electroplated finish.

**Sec. Voltage:** 12V (fixture).

**Mounting:** Rotatable and easy to position. Designed for use on MP cable system (CS) (sold separately).

**Shade:** Sold separately.

**Accessories:** Sold separately.

**Lamp (not included):** MR16, 50W Max. Covered glass recommended. (Note: GE constant color lamp cannot be used with glass shade.) For use with LED type MR16 check lamp manufacture for specification and compatibility.

**Approval:** Dry locations. Approved to US and Canadian standards by CSA.





Type:

Project:

Modified:

Quantity:

Notes:

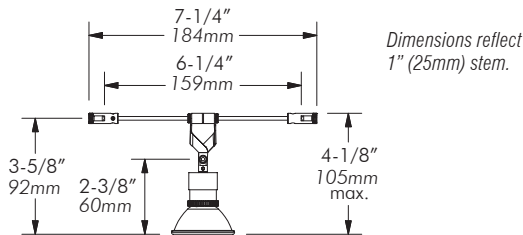

CODE	MOUNT	SHADE*	STEM	ACCESSORIES**	FINISH
<b>X01</b>	<b>CS</b>		<b>0</b>		

**CS** = cable system

- NS** = no shade  
**SC** = solid metal cap  
**SCB** = solid metal cap, black  
**PC** = perforated metal cap  
**PCB** = perforated metal cap, black  
**SM** = solid metal cone  
**SMB** = solid metal cone, black  
**PM** = perforated metal cone  
**PMB** = perforated metal cone, black  
**FR** = frosted glass cone  
**AM** = amber glass cone  
**BL** = blue glass cone  
**MA** = mesh arc

**0** = no stem available

- NA** = no accessory  
**SH** = metal shroud  
**SHB** = metal shroud, black  
**ELB** = eggcrate louver, black  
**BE** = beam elongator  
**CS** = crystal spreader  
**IR** = infrared filter  
**MS** = mistlite spreader  
**UV** = ultraviolet filter  
**LSB** = long shroud, black  
**LH** = accessory holder\*\*\*

**MC** = matte chrome  
**BN** = brushed nickel

\*\*Can select multiple items. Please specify.

\*\*\*Accessory holder required with accessories.



t 1.877.708.1184 f 604.708.1185 www.mplighting.com  
 16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada

**\*Note:** Shades are not recommended with LED lamps.