

Low Voltage Horizontal Double Rail

X01HD

SPEC SHEET



Material: Machined aluminum with electroplated finish.

Sec. Voltage: 12V (fixture).

Mounting: Rotatable and easy to position. Designed for use on MP horizontal double rail (HD) system (sold separately).


Shade: Sold separately.

Stem: Available in 1" (25mm) increments. Maximum length 96" (2438mm).

Accessories: Sold separately.

Lamp (not included): MR16, 50W Max. Covered glass recommended. (Note: GE constant color lamp cannot be used with glass shade.) For use with LED type MR16 check lamp manufacture for specification and compatibility.

Approval: Dry locations. Approved to US and Canadian standards by CSA.

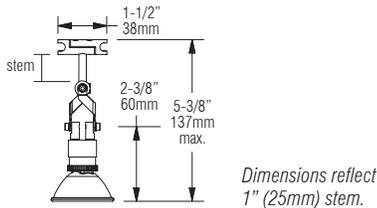

Type:
Project:

Modified:

Quantity:
Notes:



cap



metal/glass cone



arc



shroud



louver



filter/spreader

CODE	MOUNT	SHADE	STEM	ACCESSORIES**	FINISH
X01	HD				

HD = horizontal double rail

- NS = no shade
- SC = solid metal cap
- SCB = solid metal cap, black
- PC = perforated metal cap
- PCB = perforated metal cap, black
- SM = solid metal cone
- SMB = solid metal cone, black
- PM = perforated metal cone
- PMB = perforated metal cone, black
- FR = frosted glass cone
- AM = amber glass cone
- BL = blue glass cone
- MA = mesh arc

- 1 = 1" (25mm)
- X = custom length

- NA = no accessory
- SH = metal shroud
- SHB = metal shroud, black
- ELB = eggcrate louver, black
- BE = beam elongator
- CS = crystal spreader
- IR = infrared filter
- MS = mistlite spreader
- UV = ultraviolet filter
- LSB = long shroud, black
- LH = accessory holder***

- MC = matte chrome
- BN = brushed nickel

**Can select multiple items. Please specify.

***Accessory holder required with accessories.



t 1.877.708.1184 f 604.708.1185 www.mplighting.com
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada

***Note:** Shades are not recommended with LED lamps.