


X45 W3




- Material** Machined aluminum with electroplated finish.
- Sec. Voltage** 12V (fixture)
- Mounting** Wall mounted fixture designed to flood light back at wall. Comes with 120V/60W integral electronic transformer or optional 277V/75W electronic transformer.
- Shade** Sold separately.
- Stem** Standard 23" (584mm) offset from wall. Custom stem available in 1" (25mm) increments.
- Accessories** Sold separately.
- Lamp (not included)** MR16, 50W Max. Covered glass recommended. (Note: GE constant color lamp cannot be used with glass shade.) For use with LED type MR16 check lamp manufacture for specification and compatibility.
- Approval** Dry locations. Approved to US and Canadian standards by CSA.



Shades / Accessories:

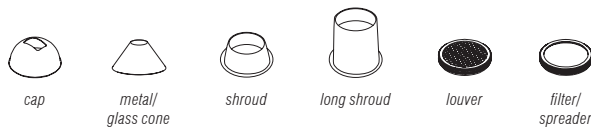

Dimension:

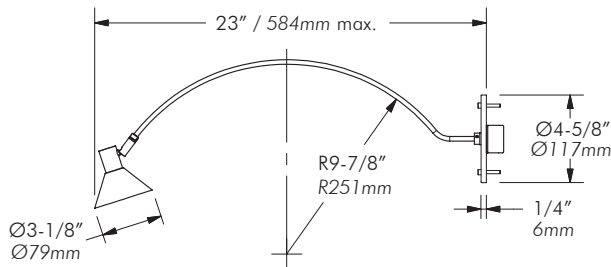

Type:

Project:

Modified:

Quantity:

Notes:

Code	Mount	Shade	Stem	Accessories*	Pri.Voltage	Finish
X45	W3	-				

- NS** = no shade
- SC** = solid metal cap
- SCB** = solid metal cap, black
- SM** = solid metal cone
- SMB** = solid metal cone, black
- 23** = 23" (584mm)
- X** = custom length (Custom length available in 1" increments. Maximum length for ceiling is 96" and 16" for SF mount.)
- NA** = no accessory
- SH** = metal shroud
- SHB** = metal shroud, black
- ELB** = eggcrate louver, black
- BE** = beam elongator
- CS** = crystal spreader
- IR** = infrared filter
- MS** = mistlite spreader
- UV** = ultraviolet filter
- LSB** = long shroud, black
- LH** = accessory holder**
- 1** = 120V
- 2** = 277V
- 4** = 230V-240V
- MC** = matte chrome
- BN** = brushed nickel

Note: Shades are not recommended with LED lamps.

*Multiple accessories can be selected.
**Accessory holder required with accessories.