R159

Windowsill light RGB White or Amber

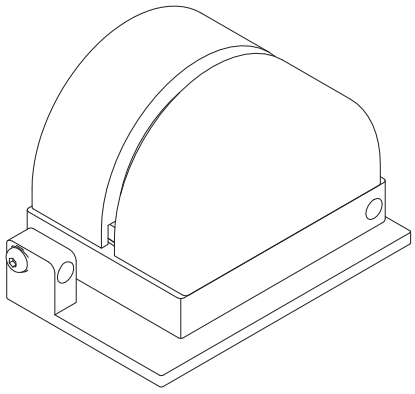

All technical information in this document is subject to change. Copyright © MP Lighting.

R159

Windowsill light RGB White or Amber

Parts

LED Fixture x 1
M3 Set Screws x 2
M3 Allen Key x 1
Mounting Screws x 2 (*not Provided, Recommended #10 Screws)*

1) Loosen set screw A to gain access to set screw B. DO NOT REMOVE THE SET SCREWS COMPLETELY.

2) Loosen set screw B to rotate the LED Fixture. DO NOT REMOVE THE SET SCREWS COMPLETELY.

3) Place the LED Fixture onto the desired surface and fasten the Mounting Screws (not provided, recommended #10 Screws) to mount the fixture. Make sure to select the right screw type for the chosen application so the fixture is mounted securely and reliably.

CONTINUE THE STEPS ON THE NEXT PAGE

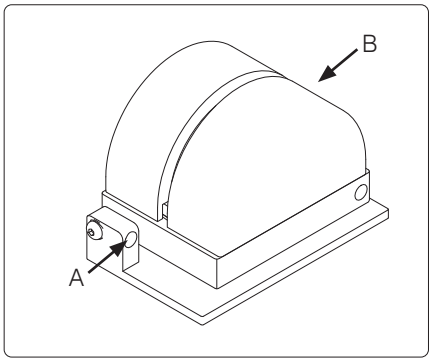

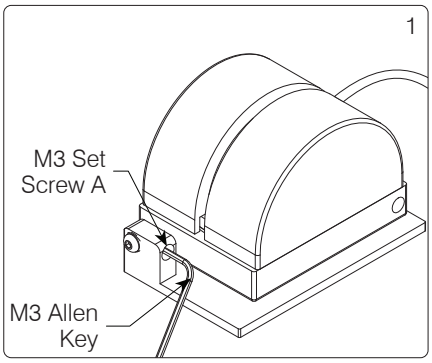

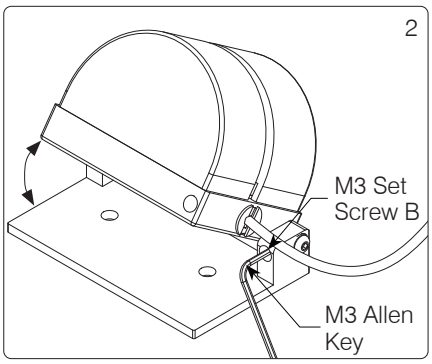

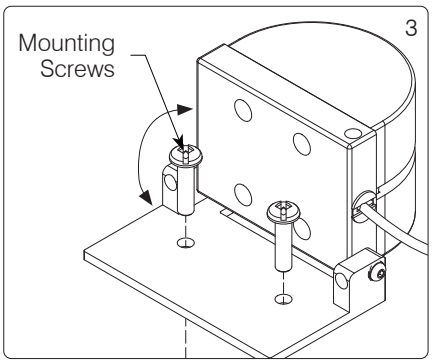

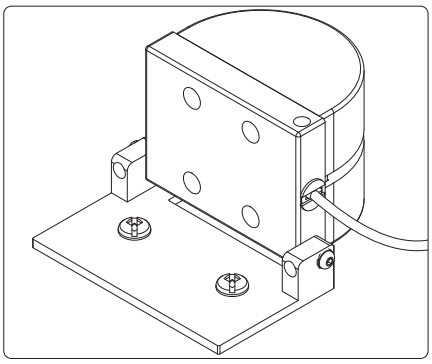

All technical information in this document is subject to change. Copyright © MP Lighting.

R159

Windowsill light RGB White or Amber

Parts

LED Fixture x 1
M3 Set Screws x 2
M3 Allen Key x 1
Mounting Screws x 2 (*not Provided, Recommended #10 Screws)*

4) Adjust the LED Fixture to the desired angle.

5) Tighten all Set Screws until it is firmly secured to lock the Fixture Angle.

6) Connect the Fixture to remote LED driver.

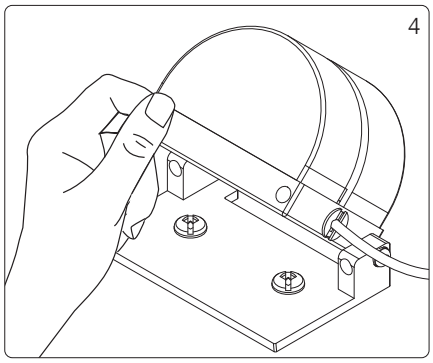

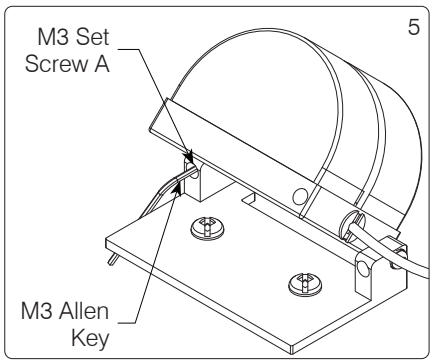

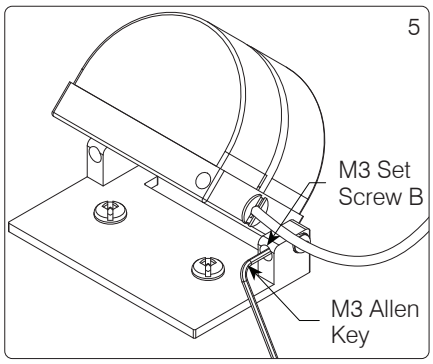

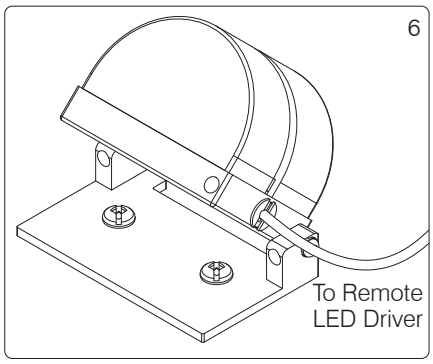

All technical information in this document is subject to change. Copyright © MP Lighting.

R159

Windowsill light RGB White or Amber

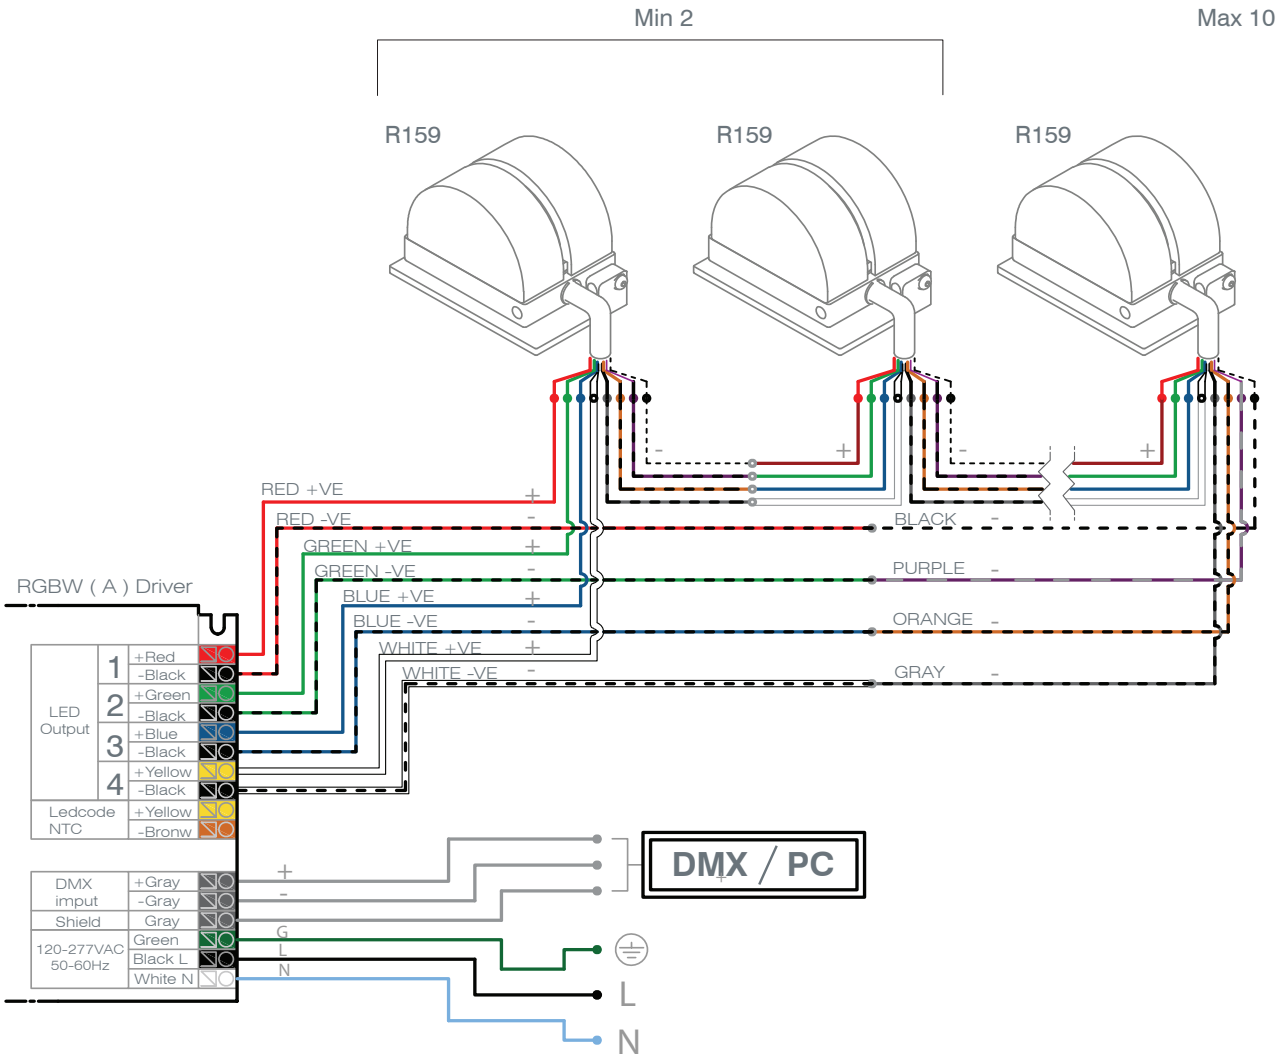

Notes:

3 Watt RGBW (A) LED fixtures only
Minimum 2 RGBW (A) LED fixtures per output
Maximum 10 RGBW (A) LED fixtures per output
Series wiring only
Dimming with DMX controls
Consult wiring diagram supplies by driver manufacturer for full details

Warning: Any other wiring than the above may cause the LED's to fail.

Wire Specs

☐ 0.5 - 1.5 mm AWG 20-16 (Mains, LED output, LEDcode)
☐ 0.2 - 1.5 mm AWG 24-16 (DMX)



11/32 inch

50 Watt 4 Output LED Driver (120 to 277V)

Single Driver Wiring Diagram Driver for 2-10 x 3 Watt RGB White or Amber Fixtures **(RGBW (A))**

All technical information in this document is subject to change. Copyright © MP Lighting.

IMPORTANT SAFETY INSTRUCTIONS

KEEP THESE INSTALLATION INSTRUCTIONS

(Including General and Additional Markings for Fixtures)

(FOR MP LIGHTING LED LUMINAIRES, CLASS 3402-xx)

General and additional markings

1. For Use Only with Certified/NRTL Driver, Model _____
2. DRY LOCATIONS ONLY

Installation instructions

1. The grounding installation shall be done in accordance with CEC-Part 1.
2. WARNING: RISK OF FIRE OR ELECTRIC SHOCK: DO NOT MAKE OR ALTER ANY OPENINGS IN THE COMPARTMENT OF WIRING OR ELECTRICAL COMPONENTS DURING INSTALLATION. DO NOT ALTER OR ADD BALLASTS, OR ANY OTHER ELECTRICAL COMPONENTS.
3. INSTALLATION AND USE OF THIS FIXTURE MOUNTING ASSEMBLY REQUIRES A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF LUMINAIRE ELECTRICAL SYSTEMS AND THE HAZARD INVOLVED, IF NOT QUALIFIED, DO NOT ATTEMPT INSTALLATION. CONTACT A QUALIFIED ELECTRICIAN.
4. TURN OFF POWER BEFORE INSTALLATION.
5. KEEP THESE INSTALLATION INSTRUCTIONS.

CONSIGNES DE SÉCURITÉ IMPORTANTES

CONSERVER CES INSTRUCTIONS D'INSTALLATION

(Dont le général et marques supplémentaires pour les appareils)

(Pour les luminaires LED MP D'ÉCLAIRAGE , CLASS 3402 -xx)

Général et marquages supplémentaires

1. A utiliser uniquement avec Certified / NRTL pilote, modèle _____
2. POUR EMPLACEMENTS SECS SEULEMENT

Les instructions d'installation

1. L'installation de mise à la terre doit être fait en conformité avec CEC Partie 1.
2. AVERTISSEMENT : RISQUE D'INCENDIE OU D'ÉLECTROCUTION : NE PAS FAIRE OU MODIFIER DES OUVERTURES DANS LE COMPARTIMENT DE CÂBLAGE OU DE COMPOSANTS ÉLECTRIQUES LORS DE L'INSTALLATION. NE PAS MODIFIER OU AJOUTER DES BALLASTS, OU AUTRES COMPOSANTS ÉLECTRIQUES
3. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONSULTER UN ÉLECTRICIEN QUALIFIÉ.
4. COUPER LE COURANT AVANT L'INSTALLATION.
5. CONSERVEZ CES INSTRUCTIONS.

All technical information in this document is subject to change. Copyright © MP Lighting.