


# L73C1

## Installation Instructions

- 1** Connect fixture wires to low voltage wiring (remote LED driver 350mA constant current).
- 2** Attach mounting plate to electrical box.
- 3** Thread C1 canopy to mounting plate.
- 4** Push in jack connector and thread cap until secure.

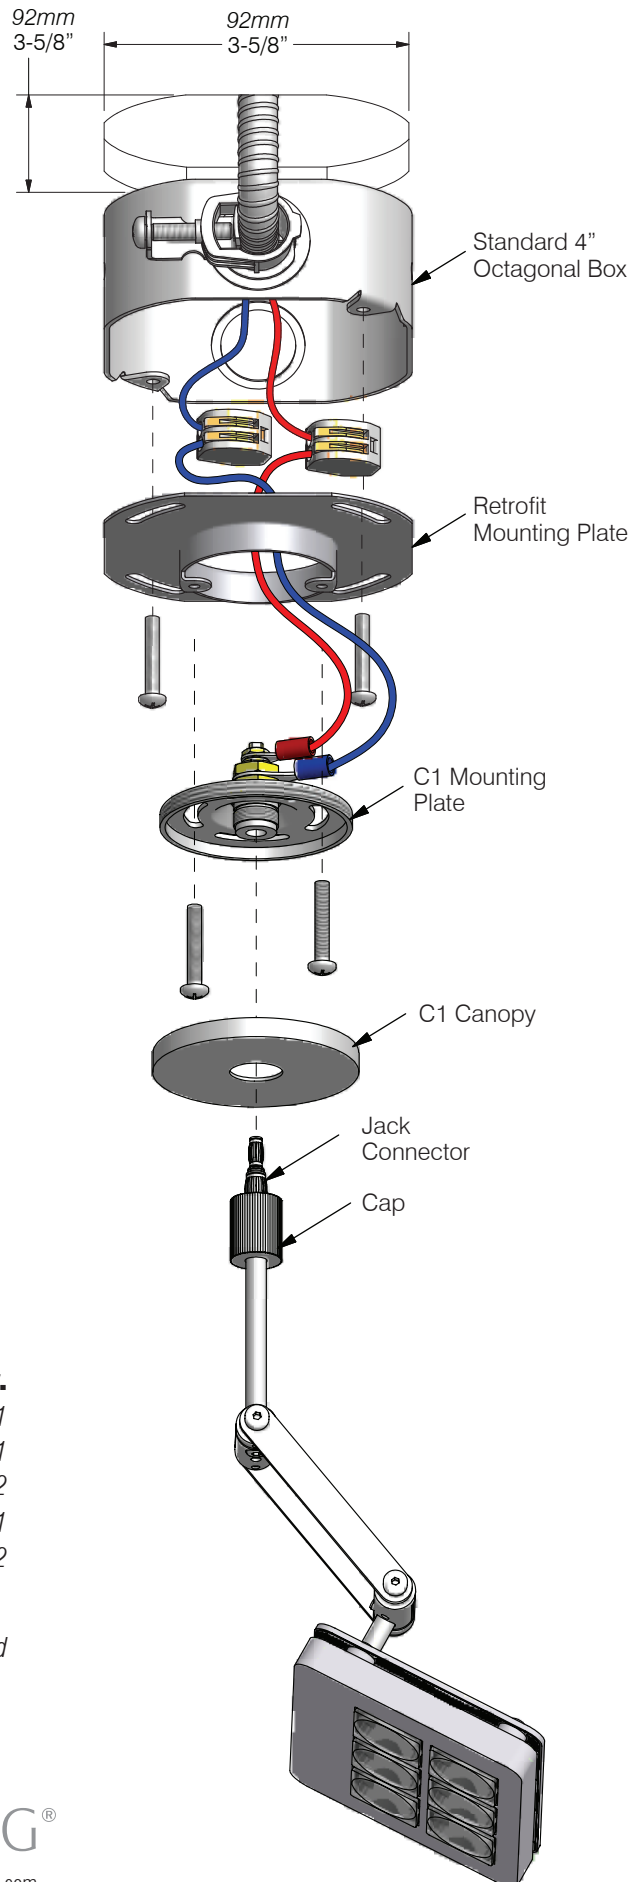

### **CAUTION**

- Read all instructions.
- **WARNING: RISK OF FIRE OR ELECTRICAL SHOCK:** Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Fixture gets very hot. Do not cover. Keep 9" away from combustible materials.
- 350mA constant current driver only.
- Do not spray water on fixture during cleaning. Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- **KEEP THESE INSTALLATION INSTRUCTIONS.**

### Parts

	<b>Qty.</b>
• LED unit	1
• C1 canopy	1
• Cross pan head screws	2
• Mounting plate	1
• Wire connectors	2

### Tools

- Phillips screwdriver *not included*

### Maintenance

Clean using a soft cloth.

**[M] MPLIGHTING®**

t1.877.708.1184 f604.708.1185 www.mplighting.com  
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada