


TLW120E150-DC4A TLW120E150-DC7A

Dual Circuit Rail Electronic Surface Mount Transformer

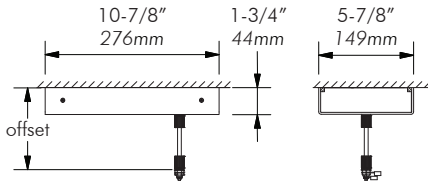

*Custom length available

Material: Steel case and copper tube with electroplated finish

Mounting: Surface mounts to standard J-box.

Electrical: 100% Duty cycle. Auto reset circuit protection. Can only be used on MP cable system. Stem can be used as a cable support. Can be dimmed using electronic low voltage dimmers (i.e. Lutron Diva).

- AC Input Voltage:** 120V, 60Hz
- DC Output Voltage:** 12V
- Output Wattage:** 150W Max. (TLW120E150-DC4A)
150W Max. (TLW120E150-DC7A)
- Maximum Load:** Depends on wattage of fixture
- Power Factor:** 95% Min
- Typical Efficiency:** 80%
- Short Circuit Protection:** Yes
- Overload Protection:** Yes
- Operating Temperature:** -10~50°C (14~122°F)
- Maximum Case Temperature:** 65°C (149°F)
- Humidity (Non-Condensing):** 5%~95%
- Weight:** 3lb / 1.4kg
- Approval:** Dry locations. Approved to UL standards by CSA/US.



Type:
Project:

Modified:

Quantity:
Notes:

CODE	WATTAGE	MOUNT	OFFSET	CANOPY	FINISH
TLW120E	- 150	DC		A	-
	150 = 150W	DC = dual circuit rail	4 = 4"/102mm from ceiling to bottom of cable 7 = 7"/178mm X = custom length	A = rectangular	MC = matte chrome BN = brushed nickel