



L92

Application: Exterior walkway and area illumination.

Source: 2.5W LED

Driver: Integral 120V primary, 3W 700mA non-dimmable driver or remote 12V AC magnetic transformer (not included).

Power Consumption: 3W

Recommended Driver/Transformer: **DC** - LED3W700i (included). Dimmable with dimming controller, 0-10V dimming (not included). Consult factory. **AC** - 12V AC magnetic transformer (not included). Consult factory for dimming option.

Weight: 7.15lbs (3.245kg) based on 24" (610mm) post.


Material: Anodized aluminum, insert trim with 1/4" (6mm) thick tempered glass lens. RoHS compliant.

Mounting: Mounts to 24" (610mm), 36" (614mm) or 48" (1219mm) anodized aluminum post. Comes with 24" (610mm) Cabtire lead inside post.

Approval: Wet and dry locations. Approved to US and Canadian standards by CSA.




Note: Can be used as emergency backup lighting in conjunction with Bodine emergency LED driver. Consult MP Lighting factory.

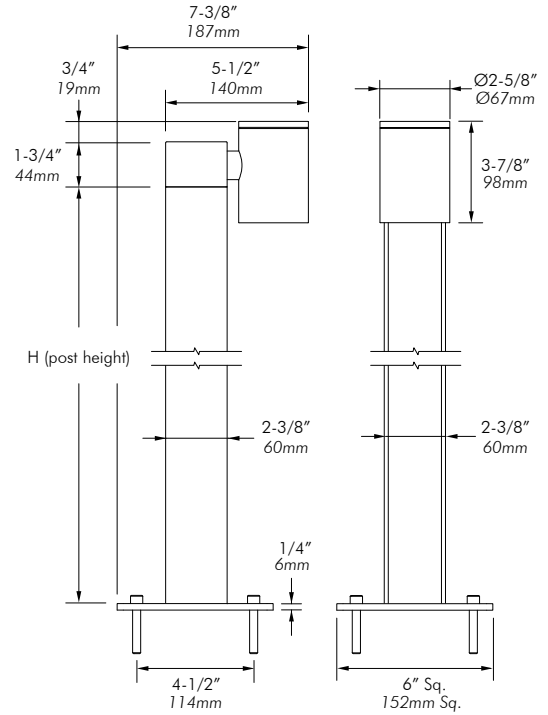


L92
12°, clear lens
3000K Std
92 lm


Polar Candela Distribution

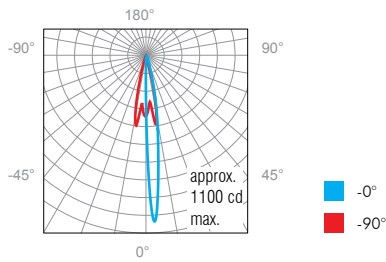


Isofootcandle Plot

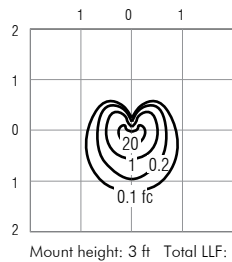

Shown with angle bracket




Shown with no angle bracket




L92
30°, clear lens
3000K Std
86 lm

Polar Candela Distribution

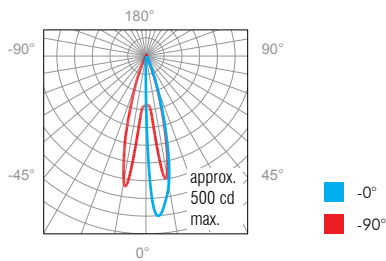

Isofootcandle Plot

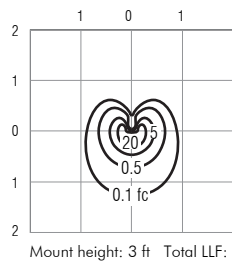

Lumen test results provided by MP Lighting integrating sphere

Note: Various operating factors may cause differences between lab and field results. As specifications may change without notice, please refer to the LED Lamp Index located in the "Downloads" section of each product webpage for the most current information.

CODE	WATTAGE	COLOR	BEAM	LENS	ANGLE BRACKET	INPUT VOLTAGE	POST HEIGHT (H)	FINISH
L92	2							MA

2 = 2.5W

W20 = 2000K
W30 = 3000K

S = spot (12°)
N = narrow flood (30°)
W = wide flood (120°)

C = clear
F = frosted

O = no angle
30 = 30° angle
X = custom (30° max.)

A = 12V AV
D = DC

24 = 24" (610mm)
36 = 36" (914mm)
48 = 48" (1219mm)

MA = matte clear anodized

Note: W20H has consistent binning that falls within 1.5 MacAdam ellipse.



t 1.877.708.1184 f 604.708.1185 www.mplighting.com
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada