


L73C2

Installation Instructions

- 1** Connect fixture wires to low voltage wiring (remote LED driver 350mA constant current).
- 2** Attach mounting plate to electrical box with screws.
- 3** Attach C2 canopy to mounting plate with setscrews.
- 4** Push in jack connector and thread cap until secure.

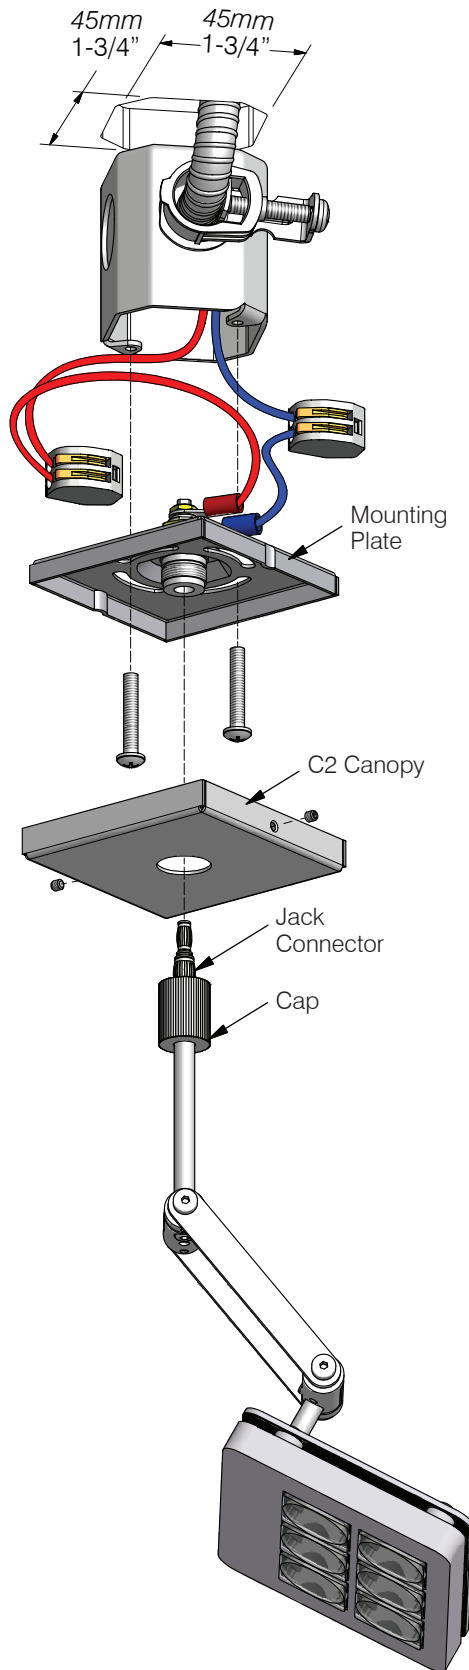

! CAUTION

- Read all instructions.
- **WARNING: RISK OF FIRE OR ELECTRICAL SHOCK:** Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Fixture gets very hot. Do not cover. Keep 9" away from combustible materials.
- 350mA constant current driver only.
- Do not spray water on fixture during cleaning. Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- **KEEP THESE INSTALLATION INSTRUCTIONS.**

Parts

	Qty.
• LED unit	1
• C2 Canopy	1
• Cross pan head screws	2
• Mounting plate	1
• Setscrews	2
• Wire connectors	2
• 1-3/4 x 1-3/4 x 2" (45 x 45 x 51mm) Electrical box	<i>included</i>
• Conduit & strain relief connector	<i>not included</i>

Tools

• Phillips screwdriver	<i>not included</i>
• Allen key	<i>included</i>

Maintenance

Clean using a soft cloth.