

# L73C4


## Installation Instructions

- 1 Connect primary to driver input wires then fit into electrical box.  
  
For remote driver connect fixture wires to low voltage wiring (remote LED driver 350mA constant current).

- 2 Align universal crossbar to electrical box and tighten mounting screws.

- 3 Attach C4 canopy to crossbar. Tighten screws with Allen Key.

- 4 Push in jack connector and thread cap until secure.

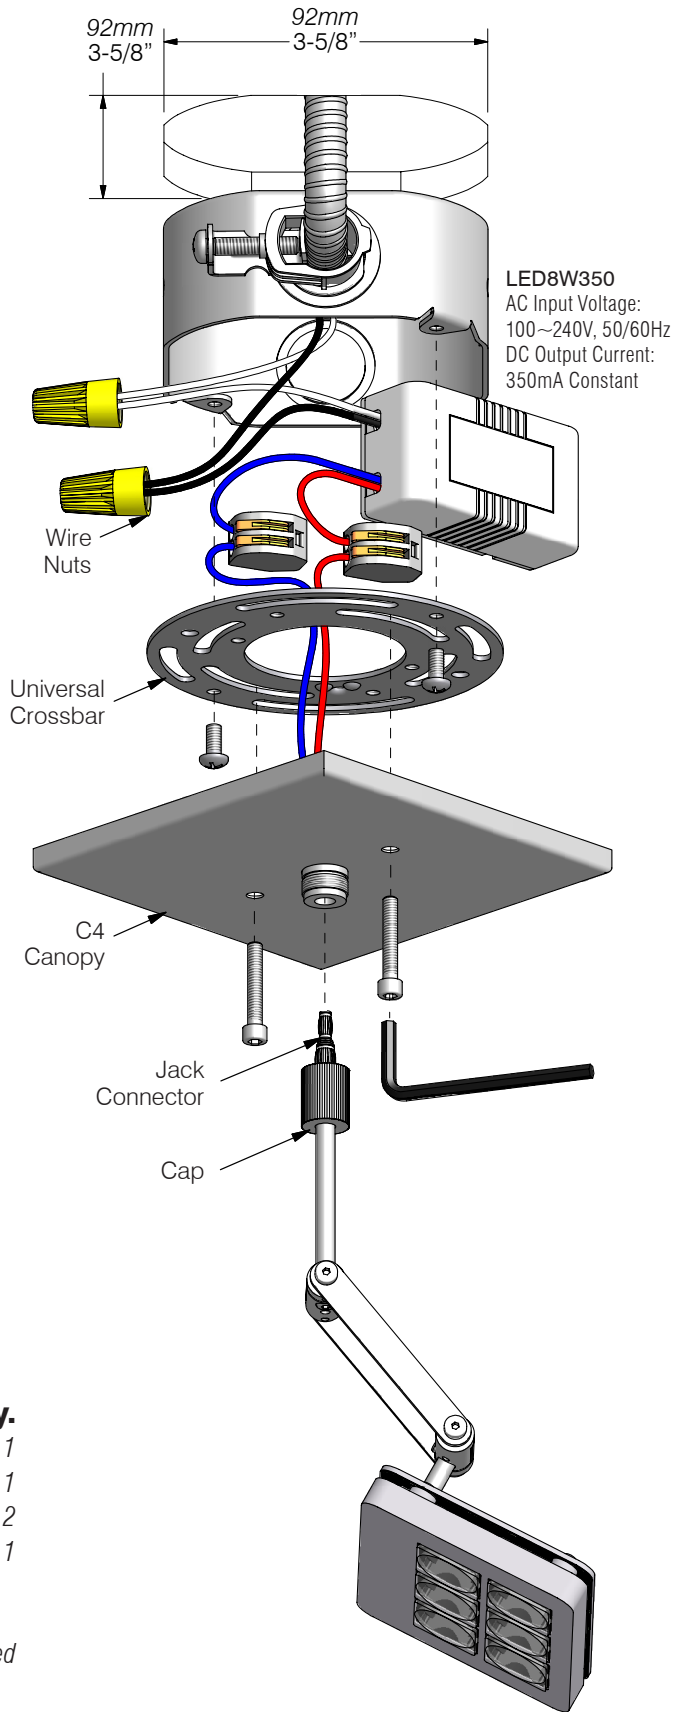

### CAUTION

- Read all instructions.
- **WARNING: RISK OF FIRE OR ELECTRICAL SHOCK:** Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Fixture gets very hot. Do not cover. Keep 9" away from combustible materials.
- 350 mA constant current driver only.
- Do not spray water on fixture during cleaning. Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- **KEEP THESE INSTALLATION INSTRUCTIONS.**

Parts	Qty.
• LED unit	1
• C4 Canopy	1
• Hex socket head screws	2
• Universal crossbar	1

Tools	
• Allen key	<i>included</i>

**Maintenance**  
Clean using a soft cloth.

