


1 Connect primary to driver input wires then fit into electrical box.

2 Align crossbar to electrical box and tighten mounting screws.

3 Align cover plate to crossbar. Tighten screws.

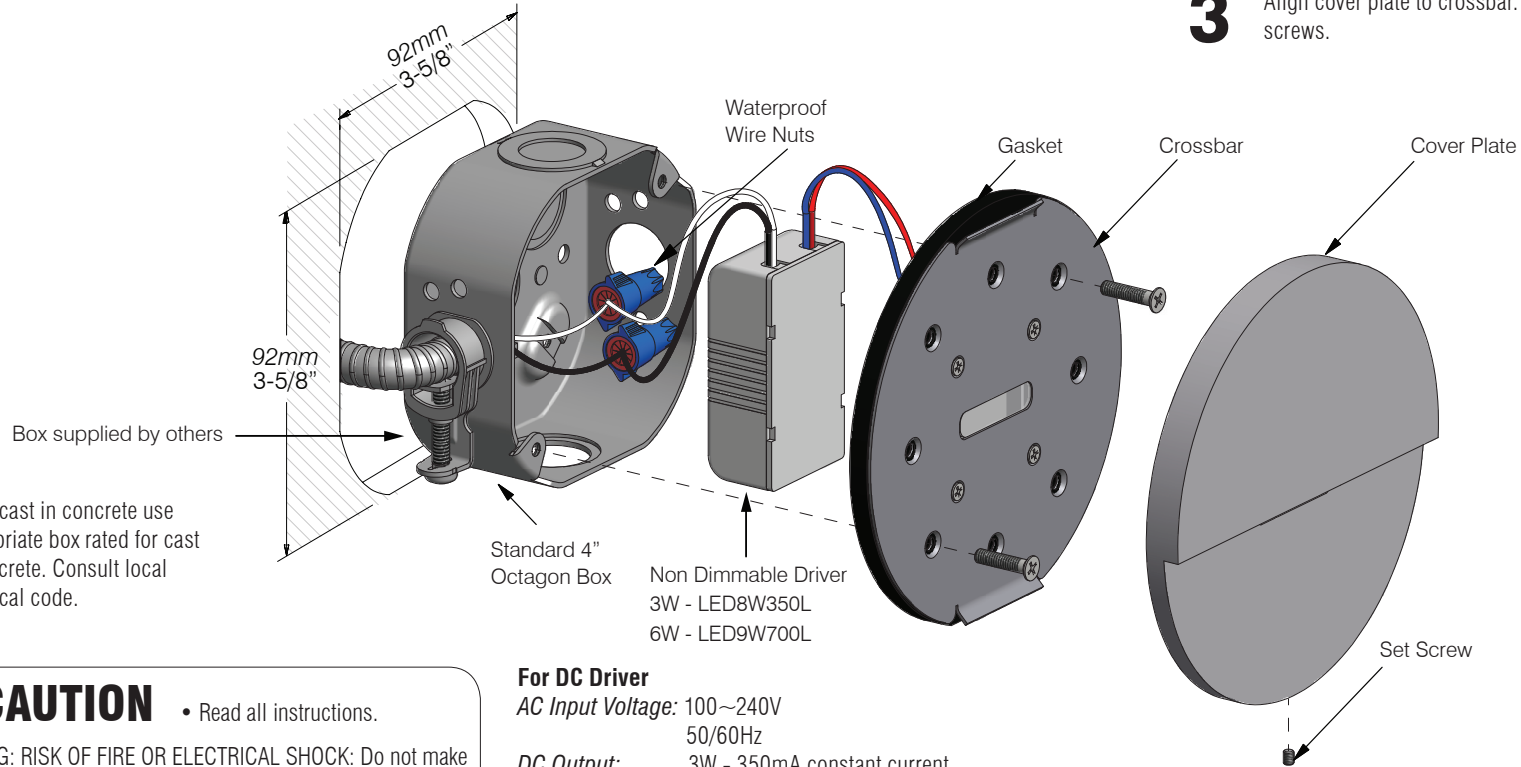

• For cast in concrete use appropriate box rated for cast in concrete. Consult local electrical code.

! CAUTION • Read all instructions.

- WARNING: RISK OF FIRE OR ELECTRICAL SHOCK: Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Do not over tighten screws.
- Do not spray water on fixture during cleaning. Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- KEEP THESE INSTALLATION INSTRUCTIONS.

For DC Driver

AC Input Voltage: 100~240V
50/60Hz

DC Output: 3W - 350mA constant current
6W - 700 mA constant current

Parts

- LED unit w/ gasket 1
- Cross countersunk screws 2
- Set Screw 1
- Universal crossbar 1
- LED driver 1
- Waterproof wire nuts 2

Qty.

Tools


- Allen Key M3 *included*
- Phillips screwdriver *not included*

Remote Driver Option

Connect fixture wires directly to low voltage box leads.

Maintenance

Use a soft cloth to remove any fingerprints.

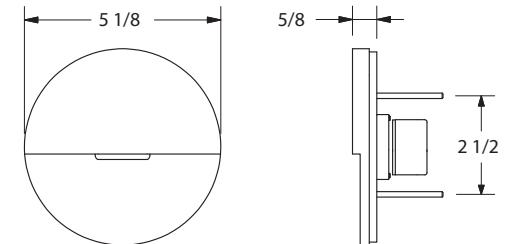


L740-L48
Installation Instructions

1 Connect primary to driver input wires then fit into electrical box.

2 Align crossbar to electrical box and tighten mounting screws.

3 Align cover plate to crossbar. Tighten screws.

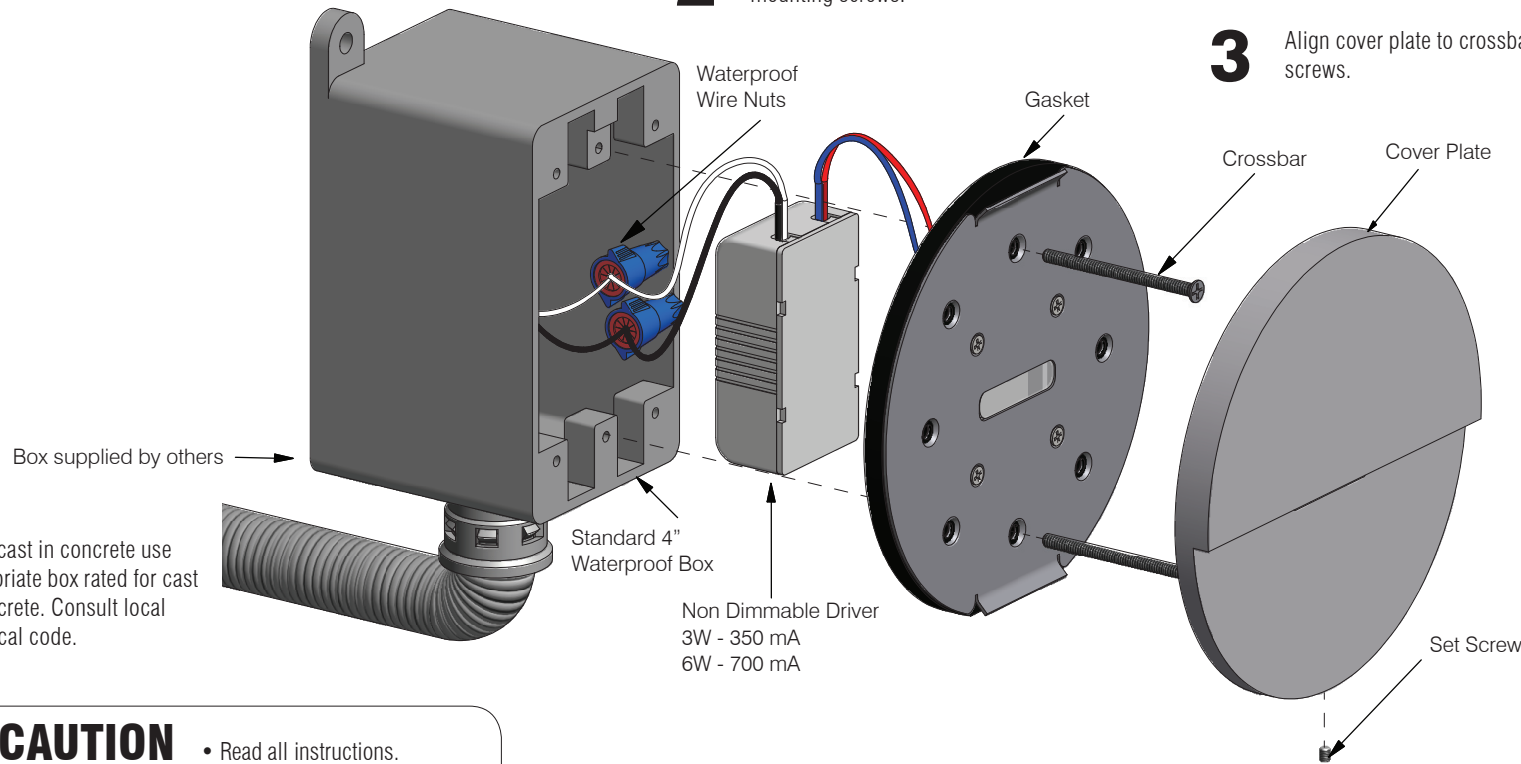

• For cast in concrete use appropriate box rated for cast in concrete. Consult local electrical code.

Non Dimmable Driver
3W - 350 mA
6W - 700 mA

CAUTION • Read all instructions.

- WARNING: RISK OF FIRE OR ELECTRICAL SHOCK: Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Do not over tighten screws.
- Do not spray water on fixture during cleaning. Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- KEEP THESE INSTALLATION INSTRUCTIONS.

For DC Driver

AC Input Voltage: 100~240V, 50/60Hz
DC Output Current: 3W - 350mA Constant Current
6W - 700 mA Constant Current

Parts

- LED unit w/ gasket 1
- Cross countersunk screws 2
- Set Screw 1
- Universal crossbar 1
- LED driver 1
- Waterproof wire nuts 2

Tools

- Allen Key M3 *included*
- Phillips screwdriver *not included*



Qty.

Remote Driver Option

Connect fixture wires directly to low voltage box leads.

Maintenance

Use a soft cloth to remove any fingerprints.



L740-L48
Installation Instructions