


**1** Connect primary to driver input wires then fit into electrical box.

**2** Align crossbar to electrical box and tighten mounting screws.

**3** Align cover plate to crossbar. Tighten screws.

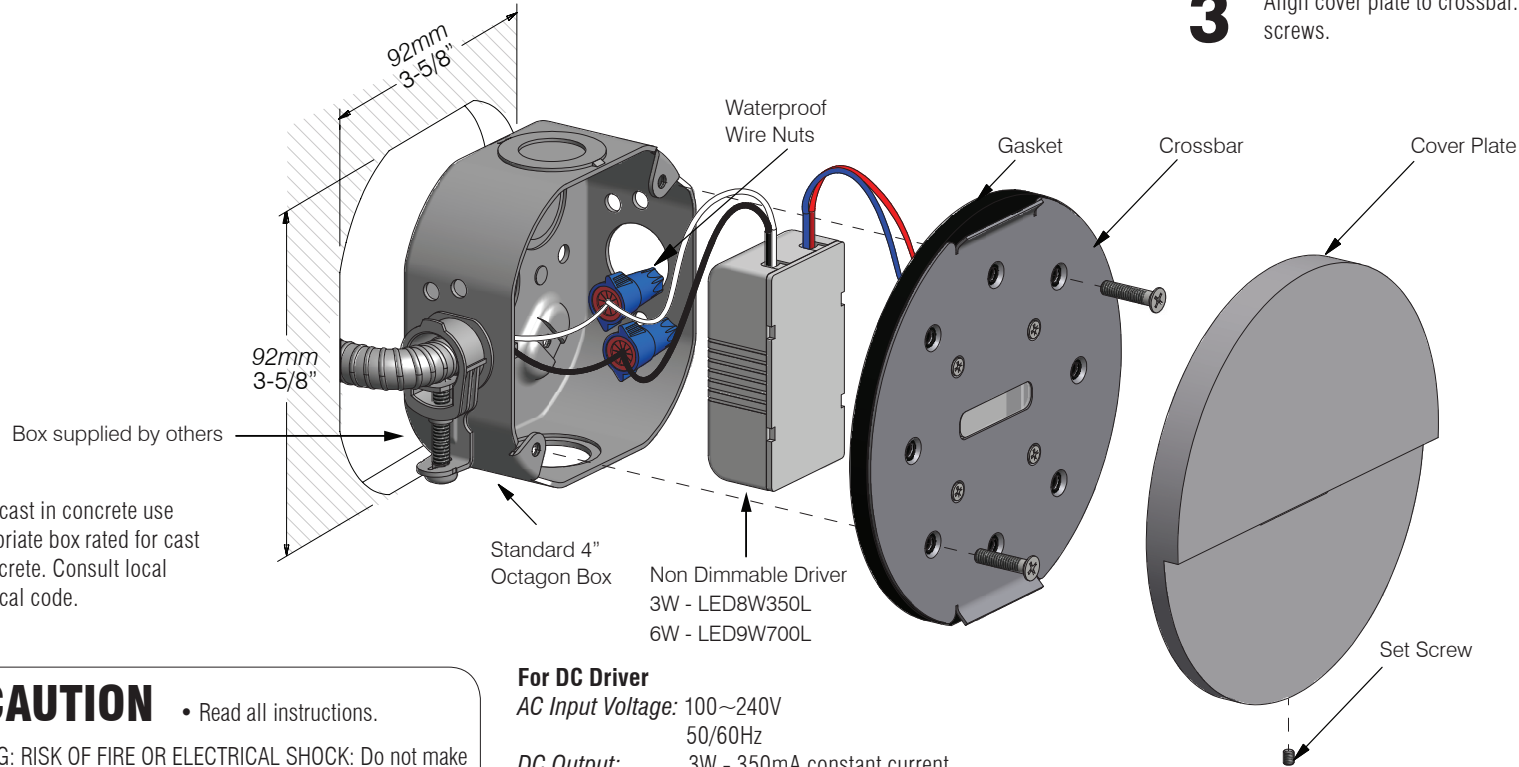

• For cast in concrete use appropriate box rated for cast in concrete. Consult local electrical code.

**CAUTION** • Read all instructions.

- **WARNING: RISK OF FIRE OR ELECTRICAL SHOCK:** Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Do not over tighten screws.
- Do not spray water on fixture during cleaning. Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- **KEEP THESE INSTALLATION INSTRUCTIONS.**

**For DC Driver**

*AC Input Voltage:* 100~240V  
50/60Hz

*DC Output:* 3W - 350mA constant current  
6W - 700 mA constant current

**Parts**

- LED unit w/ gasket 1
- Cross countersunk screws 2
- Set Screw 1
- Universal crossbar 1
- LED driver 1
- Waterproof wire nuts 2

**Qty.**

**Tools**



- Allen Key M3 *included*
- Phillips screwdriver *not included*

**Remote Driver Option**

Connect fixture wires directly to low voltage box leads.

**Maintenance**

Use a soft cloth to remove any fingerprints.




**L741-L48**

Installation Instructions

**1** Connect primary to driver input wires then fit into electrical box.

**2** Align crossbar to electrical box and tighten mounting screws.

**3** Align cover plate to crossbar. Tighten screws.

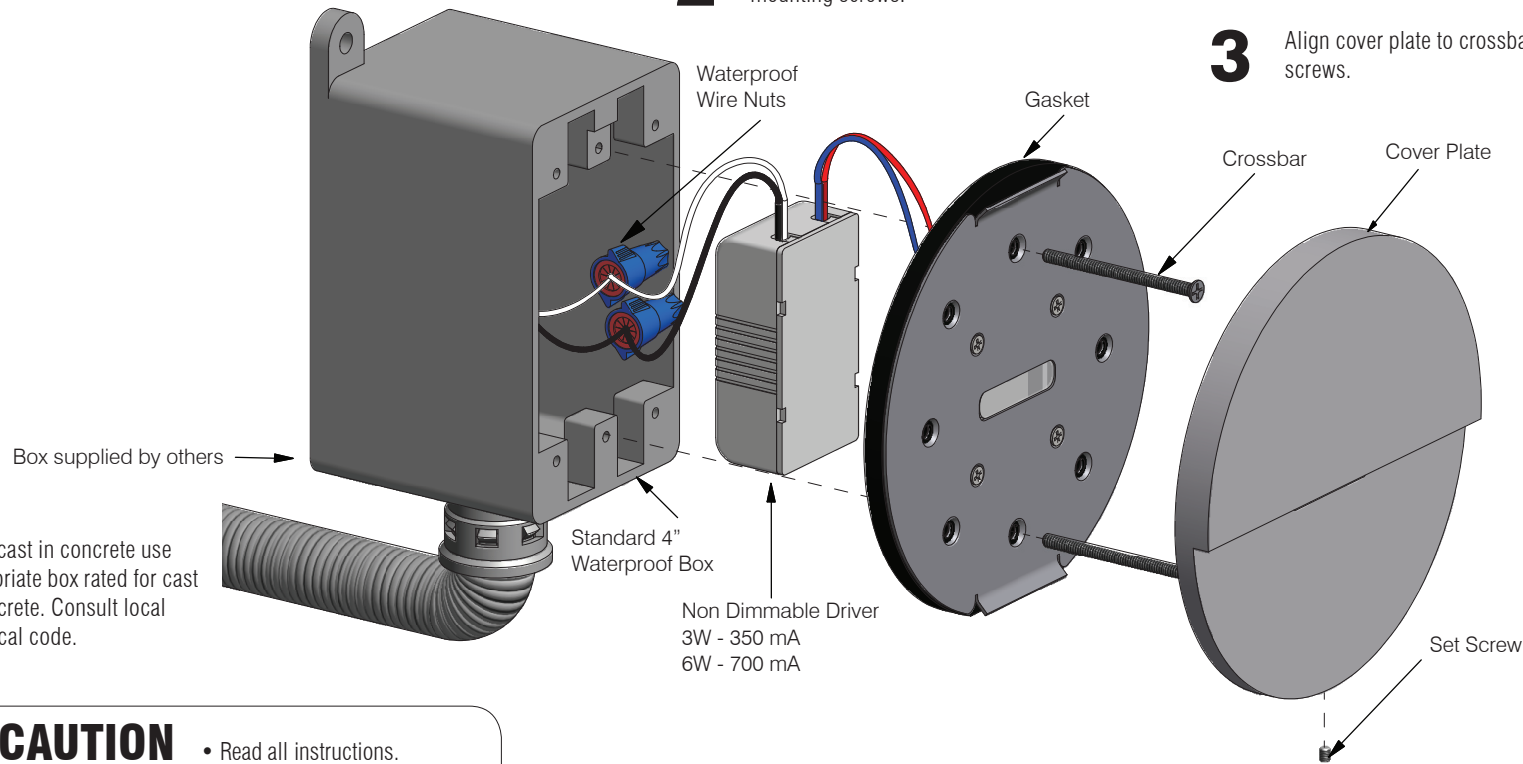

• For cast in concrete use appropriate box rated for cast in concrete. Consult local electrical code.

Non Dimmable Driver  
3W - 350 mA  
6W - 700 mA

**CAUTION** • Read all instructions.

- WARNING: RISK OF FIRE OR ELECTRICAL SHOCK: Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Do not over tighten screws.
- Do not spray water on fixture during cleaning. Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- KEEP THESE INSTALLATION INSTRUCTIONS.

**For DC Driver**

*AC Input Voltage:* 100~240V, 50/60Hz  
*DC Output Current:* 3W - 350mA Constant Current  
6W - 700 mA Constant Current

**Parts**

- LED unit w/ gasket 1
- Cross countersunk screws 2
- Set Screw 1
- Universal crossbar 1
- LED driver 1
- Waterproof wire nuts 2

**Tools**

- Allen Key M3 *included*
- Phillips screwdriver *not included*



**Qty.**

**Remote Driver Option**

Connect fixture wires directly to low voltage box leads.

**Maintenance**

Use a soft cloth to remove any fingerprints.



**L741-L48**

Installation Instructions