



Type:

Project:

Modified:

Quantity:

Notes:

L06

Application Exterior/interior indicator light for driveway and sidewalk.
Recommended Projects - Commercial, Residential, Institutional, Retail, Clinic, Hospitality, Religious, Educational, Architecture

IP Rating 66

Mounting Can be buried in earth/gravel or cast into concrete with or without mounting box.

Electrical Powered by remote dimmable/ non-dimmable driver (sold separately).

**See website for recommended drivers*

**Remote emergency driver / inverter options available. Consult factory.*

Power Consumption 0.2 Watt

Light Output 0.2 Watt, 2.7lm

**For photometric data, see page 02*

Warranty 5 years limited warranty
Estimated useful life of LED is 50,000 hours.

Material Solid anodized aluminum or marine grade stainless steel (316), RoHS compliant.

Weight 1.21lbs (0.549kg)

Approval



DISCLAIMER Malfunction and damage to product due to improper dimming system installation or misuse will not be covered under warranty. Only DC Drivers are recommended for dimming systems. Consult MP Lighting for recommended drivers.


**MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products.*

Order Guide


Example: L06-W22S-C-B-3-S6

Code	Color	Lens	Mounting Box	Nipple	Finish
L06	-				S6
	W22S = 2200K, 80+ CRI W27H = 2700K, 90+ CRI W30H = 3000K, 90+ CRI W35H = 3500K, 90+ CRI W41H = 4100K, 90+ CR	C = clear F = frosted	B = with mounting box N = no mounting box	3 = 3" (76.2mm) X = custom length <i>*max nipple length 6" (152mm)</i>	S6 = stainless steel 316


DIMENSION:

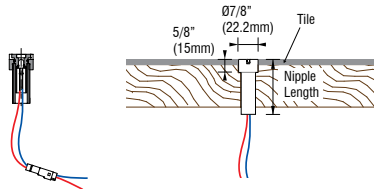



without mounting box



with mounting box



with mounting box

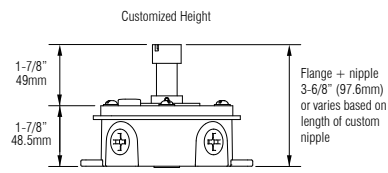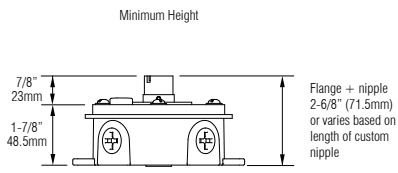


PHOTOMETRIC DATA:

0.2W, 2700K, 90+ CRI

Polar Candela Distribution

Illuminance at a Distance

Lumen: 2.7lm



	Center Beam FC	Beam Width
1.5'	1.69	1.2' (0.37m) 1.3' (0.40m)
3.0'	0.42	2.5' (0.76m) 2.5' (0.76m)
4.5'	0.19	3.7' (1.28m) 3.8' (1.16m)
6.0'	0.11	4.9' (1.49m) 5.0' (1.52m)
7.5'	0.07	6.2' (1.89m) 6.3' (1.92m)
9.0'	0.05	7.4' (2.26m) 7.5' (2.29m)

■ 0° Spread: 44.6° ■ 90° Spread: 45.3°