

Type:

Project:

Modified:

Quantity:

Notes:

L07

Application

Exterior/interior indicator light for deck flooring.
Recommended Projects - Commercial, Residential, Institutional, Retail, Clinic, Hospitality, Religious, Educational, Architecture

IP Rating

67

Mounting

Mounts directly into deck flooring.

Electrical

Powered by remote dimmable/ non-dimmable driver (sold separately).

**See website for recommended drivers*

**Remote emergency driver / inverter options available. Consult factory.*

Power Consumption

0.2 Watt

Light Output

0.2 Watt, W27H 90+CRI, 2.7lm

**For photometric data, see page 02*

Warranty

5 years limited warranty

Estimated useful life of LED is 50,000 hours.

Material

Marine grade stainless steel 316. RoHS Compliant.

Weight

1.21lbs (0.549kg).

Approval



DISCLAIMER

Malfunction and damage to product due to improper dimming system installation or misuse will not be covered under warranty. Only DC Drivers are recommended for dimming systems. Consult MP Lighting for recommended drivers.


*MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products.

Order Guide

Example: L07-W27H-C-S6

Code	Color	Lens	Finish
L07	-	-	S6
W22S = 2200K, 80+ CRI	C = clear	S6 = stainless steel 316	
W27H = 2700K, 90+ CRI	F = frosted		
W30H = 3000K, 90+ CRI			
W35H = 3500K, 90+ CRI			
W41H = 4100K, 90+ CRI			

DIMENSION:

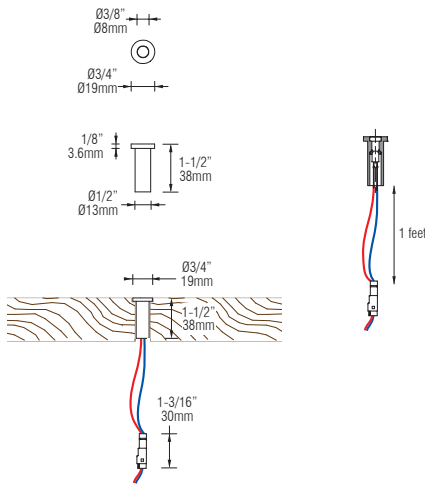


PHOTOMETRIC DATA:

0.2W, 2700K, 90+ CRI

Polar Candela Distribution

Illuminance at a Distance

Lumen: 2.7lm



	Center Beam FC	Beam Width	
1.5'	1.69	1.2' (0.37m)	1.3' (0.40m)
3.0'	0.42	2.5' (0.76m)	2.5' (0.76m)
4.5'	0.19	3.7' (1.28m)	3.8' (1.16m)
6.0'	0.11	4.9' (1.49m)	5.0' (1.52m)
7.5'	0.07	6.2' (1.89m)	6.3' (1.92m)
9.0'	0.05	7.4' (2.26m)	7.5' (2.29m)

0° Spread: 44.6° 90° Spread: 45.3°