




L150

- Application** Designed for windows on the bottom of the window, shining up.
- IP Rating** 66
- Mounting** Fastened by two screws.
- Electrical** 2.5 Watt
 *See website for recommended drivers
 *Remote emergency driver / inverter options available. Consult factory.
- Power Consumption** 3 Watt
- Light Output** 3 Watt 125.9 lm
 *For photometric data, see page 02
- Warranty** 5 years limited warranty
 Estimated useful life of LED is 50,000 hours.
- Material** Solid anodized aluminum. RoHS compliant.
- Weight** -
- Approval** 

Type:

Project:

Modified:

Quantity:

Notes:

DISCLAIMER - When using a control system, consult dimming system manufacturer with minimum load before installing 12V AC transformer. Malfunction and damage to product due to improper dimming system installation or misuse will not be covered under warranty. Only DC Drivers are recommended for dimming systems. Consult MP Lighting for recommended drivers.


*MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products.

Order Guide

Example: L150-2-W30S-S-BA

Code	Wattage	Color	Beam	Finish
L150	-	2		
	2 = 2.5W	W27S = 2700K, 80+CRI W30S = 3000K, 80+CRI W35S = 3500K, 80+CRI W41S = 4100K, 80+CRI W20H = 2000K, 90+CRI W30H = 3000K, 90+CRI	E = 10° by 100° beam	BA = black anodized

DIMENSION:

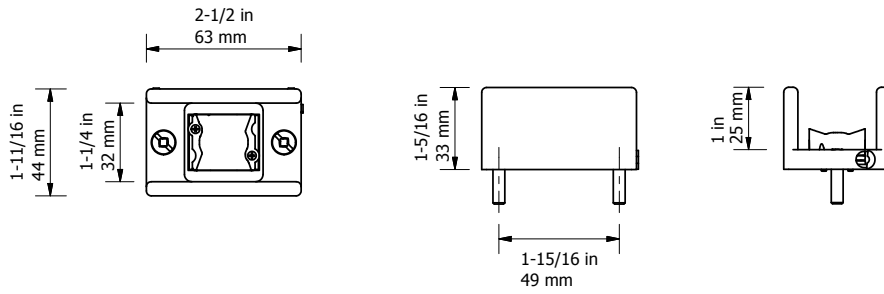


PHOTOMETRIC:

2.5 W, 3000K, 80+ CRI

Polar Candela Distribution

Illuminance at a Distance

Lumen: 125.9lm, Elliptical beam (10° by 100°)



	Center Beam FC	Beam Width	
1.5'	30.8	0.6' (0.18m)	0.4' (0.12m)
3.0'	7.71	1.2' (0.37m)	0.8' (0.24m)
4.5'	3.42	1.9' (0.58m)	1.2' (0.37m)
6.0'	1.93	2.5' (0.76m)	1.5' (0.46m)
7.5'	1.23	3.1' (0.94m)	1.9' (0.58m)
9.0'	0.86	3.7' (1.13m)	2.3' (0.70m)

■ 0° Spread: 23.4° ■ 90° Spread: 14.7°