




L198

- Application** Exterior Pendant for use in open space with high ceiling or where higher light levels are required.
- IP Rating** 62
- Mounting** Mounts to C3 Canopy or using a plug & socket clip connector with turn buckle (not included)
*For more information consult with factory or see installation guide
- Electrical** 700mA / 12V DC
DC - Powered by remote 120V primary, 700mA driver (not included). Recommended LED10W350D. Dimmable driver available. Consult factory.
- Power Consumption** 8W
- Light Output** 8W - 433lm
- Warranty** 5 years limited warranty
Estimated useful life of LED is 50,000 hours.
- Material** PMMA
- Weight** 1.5lbs (0.7kg)
- Approval** 

Type:

Project:

Modified:

Quantity:


Notes:

Order Guide


Example: L198-C3-2-W30S-S6-MA

Code	Mount	Length	Color	Stem / Cord	Finish
L198	-	-	-	-	-
	PS = Plug & socket clip connector w/ Turn buckle C3 = Ø4-5/8" x 1/4" canopy	2 = 2' 4 = 4'	W27H = 2700K, 90+CRI W30H = 3000K, 90+CRI	S6 = 6" (152mm) stem SX = custom stem* C72 = 72" (1829mm) cord CX = custom cord	MA = matte clear anodized
* available in 1" (25mm) increments up to 8ft (2439mm) max.					

Dimension:

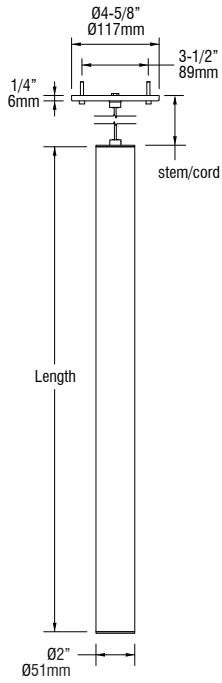

Shown with C3 canopy

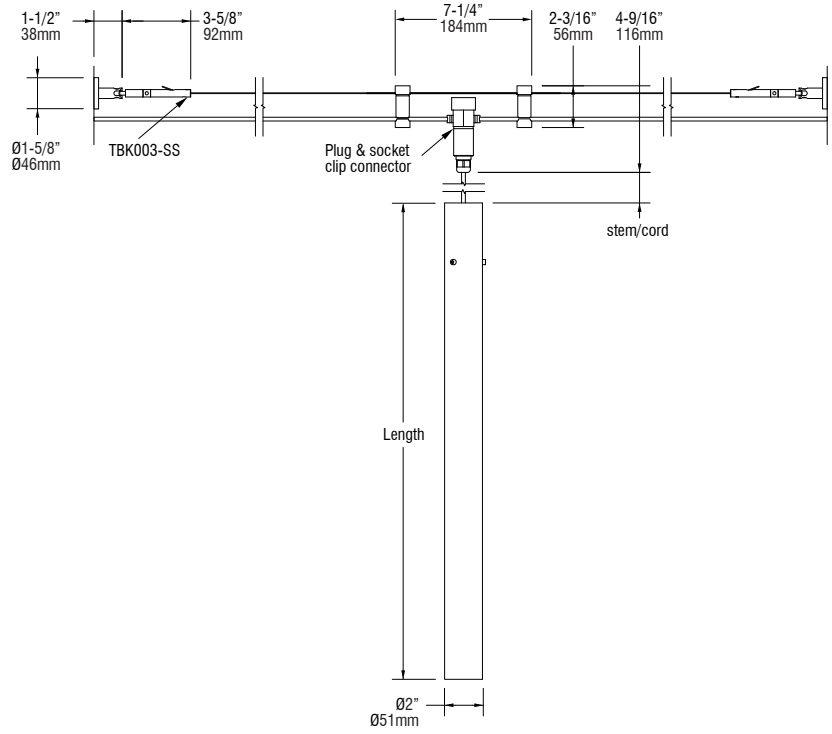

Shown with Plug & Socket Clip Connector with Turn Buckle


PHOTOMETRIC DATA:

8W, 2700K 90+CRI, 19°

Polar Candela Distribution

Illuminance at a Distance

Lumen: 433 lm



	Center Beam FC	Beam Width	
3.0'	328	1.0' (0.30m)	1.0' (0.30m)
6.0'	81.9	2.1' (0.64m)	2.1' (0.64m)
9.0'	36.4	3.1' (0.94m)	3.1' (0.94m)
12'	20.5	4.1' (1.25m)	4.1' (1.25m)
15'	13.1	5.2' (1.58m)	5.2' (1.58m)
18'	9.10	6.2' (1.89m)	6.2' (1.89m)

■ 0° Spread: 19.5° ■ 90° Spread: 19.5°