




L225SF-M

- Application** Interior directional light for wall, picture or signage illumination.
- IP Rating** 20
- Mounting** Rotatable and easy to position. Designed for use on MP single rail flush wall (SF) system (sold separately)
* See installation sheet.
- Electrical** 4W / 8W
- Power Supply** Powered by remote dimmable/ non-dimmable driver (sold separately).
*Consult factory for dimming options
- Power Consumption** 4.0 Watt
8.0 Watt
- Light Output** 4.0 Watt, 224~261lm
8.0 Watt, 372~433lm
- Warranty** 5 years limited warranty
Estimated useful life of LED is 50,000 hours.
- Material** Solid anodized aluminum . RoHS compliant.
- Weight** -
- Approval** 

Type:


Project:

Modified:

Quantity:

Notes:

Dimension:

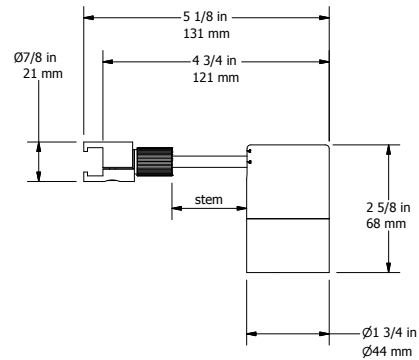

Order Guide

Example: L225-SF-M-8-W27H-S-NA-2-MA

Code	Mount	Size	Wattage	Color	Beam	Shroud	Stem	Finish
L225	-	M	-			CS		-
	SF = single rail flush wall	M = medium	4 = 4.0W 8 = 8.0W	W27H = 2700K, 90+CRI W30H = 3000K, 90+CRI	S = spot (12°) N = narrow flood (30°) F = flood (48°)	CS = cylinder shroud	2 = 2" (51mm) X = custom length	MA = matte clear anodized
							*Available in 1" (25mm) increments up to 8ft (2.4m) maximum.	*Please contact factory for custom finish for shrouds.


PHOTOMETRIC DATA:

4W, 3000K 90+CRI, 19°

Polar Candela Distribution

Illuminance at a Distance

Lumen: 261 lm



	Center Beam FC	Beam Width	
3.0'	197	1.0' (0.30m)	1.0' (0.30m)
6.0'	49.3	2.1' (0.64m)	2.1' (0.64m)
9.0'	21.9	3.1' (0.94m)	3.1' (0.94m)
12'	12.3	4.1' (1.25m)	4.1' (1.25m)
15'	7.89	5.2' (1.58m)	5.2' (1.58m)
18'	5.48	6.2' (1.89m)	6.2' (1.89m)


0° Spread: 19.5° 90° Spread: 19.5°

8W, 3000K 90+CRI, 19°

Polar Candela Distribution

Illuminance at a Distance

Lumen: 433 lm



	Center Beam FC	Beam Width	
3.0'	328	1.0' (0.30m)	1.0' (0.30m)
6.0'	81.9	2.1' (0.64m)	2.1' (0.64m)
9.0'	36.4	3.1' (0.94m)	3.1' (0.94m)
12'	20.5	4.1' (1.25m)	4.1' (1.25m)
15'	13.1	5.2' (1.58m)	5.2' (1.58m)
18'	9.10	6.2' (1.89m)	6.2' (1.89m)


0° Spread: 19.5° 90° Spread: 19.5°

4W, 3000K 90+CRI, 27°

Polar Candela Distribution

Illuminance at a Distance

Lumen: 251 lm



	Center Beam FC	Beam Width	
3.0'	57.4	1.4' (0.43m)	1.4' (0.43m)
6.0'	14.3	2.9' (0.88m)	2.9' (0.88m)
9.0'	6.38	4.3' (1.31m)	4.3' (1.31m)
12'	3.59	5.7' (1.74m)	5.7' (1.74m)
15'	2.30	7.2' (2.19m)	7.2' (2.19m)
18'	1.59	8.6' (2.62m)	8.6' (2.62m)


0° Spread: 26.9° 90° Spread: 26.9°

8W, 3000K 90+CRI, 27°

Polar Candela Distribution

Illuminance at a Distance

Lumen: 418 lm



	Center Beam FC	Beam Width	
3.0'	95.3	1.4' (0.43m)	1.4' (0.43m)
6.0'	23.8	2.9' (0.88m)	2.9' (0.88m)
9.0'	10.6	4.3' (1.31m)	4.3' (1.31m)
12'	5.95	5.7' (1.74m)	5.7' (1.74m)
15'	3.81	7.2' (2.19m)	7.2' (2.19m)
18'	2.65	8.6' (2.62m)	8.6' (2.62m)


0° Spread: 26.9° 90° Spread: 26.9°

4W, 3000K 90+CRI, 48°

Polar Candela Distribution

Illuminance at a Distance

Lumen: 224 lm



	Center Beam FC	Beam Width	
3.0'	33.4	2.6' (0.79m)	2.6' (0.79m)
6.0'	8.34	5.3' (1.62m)	5.3' (1.62m)
9.0'	3.71	7.9' (2.41m)	7.9' (2.41m)
12'	2.09	10.6' (3.23m)	10.6' (3.23m)
15'	1.33	13.2' (4.02m)	13.2' (4.02m)
18'	0.93	15.9' (4.85m)	15.9' (4.85m)


0° Spread: 47.6° 90° Spread: 47.6°

8W, 3000K 90+CRI, 48°

Polar Candela Distribution

Illuminance at a Distance

Lumen: 372 lm



	Center Beam FC	Beam Width	
3.0'	55.4	2.6' (0.79m)	2.6' (0.79m)
6.0'	13.9	5.3' (1.62m)	5.3' (1.62m)
9.0'	6.16	7.9' (2.41m)	7.9' (2.41m)
12'	3.46	10.6' (3.23m)	10.6' (3.23m)
15'	2.22	13.2' (4.02m)	13.2' (4.02m)
18'	1.54	15.9' (4.85m)	15.9' (4.85m)

0° Spread: 47.6° 90° Spread: 47.6°