



P96C1

Material: Anodized aluminum. RoHS compliant.

Mounting: Retrofit to existing standard octagonal box using custom mounting plate (included).

Sec. Voltage: 12V

Lamp (not included): MR16 or BI-PIN, 50W max.

Weight: 1.87lbs (0.846kg).

Approval: Dry locations. Approved to US and Canadian standards by CSA.



Emergency Driver options (remote):

MP Lighting Emergency Backup Unit.

Input: 100-277V, 50/60Hz / Output: 11-36V, 16W

Bodine Emergency Micro Inverter

Input: 120/277V, 50/60Hz / Output: 120/277V, 60Hz, 20W

Type:


Project:

Modified:

Quantity:

Notes:

Dimension:

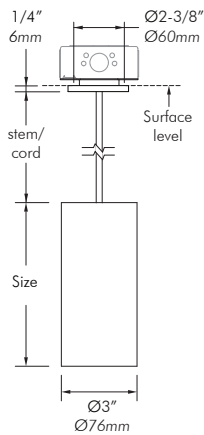

C1M (retrofit mounting plate)

Code	Mount	Size	Pri.Voltage	Stem/Cord	Finish
P96	C1M	-	-	-	-

C1M = Ø2-3/8" x 1/4" canopy w/ retrofit mounting plate

S = 6-3/8" L = 18"

1 = 120V 2 = 277V

* Note: Large size only available in black, with black cord.

S6 = 6" (152mm) stem
 SX = custom stem
 C72 = 72" (1829mm) cord
 CX = custom cord

MA = matte clear anodized
 BA = black anodized