



P96C4

Material: Anodized aluminum. RoHS compliant.

Mounting: 4-5/8" Sq. x 1/4" (117mm Sq. x 6mm) canopy. Comes with 75W/120V integral electronic transformer. Mounts to standard octagonal box (not included).

Sec. Voltage: 12V

Lamp (not included): MR16 or BI-PIN, 50W max.

Weight: 1.87lbs (0.846kg).

Approval: Dry locations. Approved to US and Canadian standards by CSA.



Emergency Driver options (remote):

MP Lighting Emergency Backup Unit.

Input: 100-277V, 50/60Hz / Output: 11-36V, 16W

Bodine Emergency Micro Inverter

Input: 120/277V, 50/60Hz / Output: 120/277V, 60Hz, 20W

Type:


Project:

Modified:

Quantity:

Notes:

Dimension:

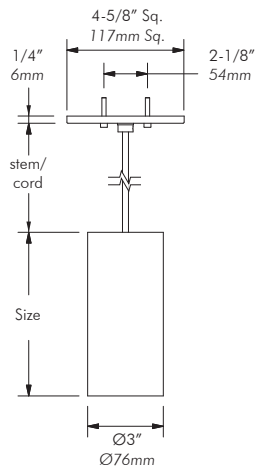

Code	Mount	Size	Pri.Voltage	Stem/Cord	Finish
P96	C4	-	-	-	-
<p>C4 = 4-5/8" Sq. x 1/4" canopy S = 6-3/8" L = 18" 1 = 120V 2 = 277V</p> <p>S6 = 6" (152mm) stem SX = custom stem C72 = 72" (1829mm) cord CX = custom cord</p> <p>MA = matte clear anodized BA = black anodized</p> <p><i>* Note: Large size only available in black, with black cord.</i></p>					