



P97C3

Material: Anodized aluminum. RoHS compliant.

Mounting: Ø4-5/8" x 1/4" (Ø117mm x 6mm) canopy. Mounts to standard octagonal box (not included).

Sec. Voltage: 12V

Lamp (not included): MR16 or BI-PIN, 50W max.

Approval: Dry locations. Approved to US and Canadian standards by CSA.



Emergency Driver options (remote):

MP Lighting Emergency Backup Unit.

Input: 100-277V, 50/60Hz / Output: 11-36V, 16W

Bodine Emergency Micro Inverter

Input: 120/277V, 50/60Hz / Output: 120/277V, 60Hz, 20W

Type:


Project:

Modified:

Quantity:

Notes:

Dimension:

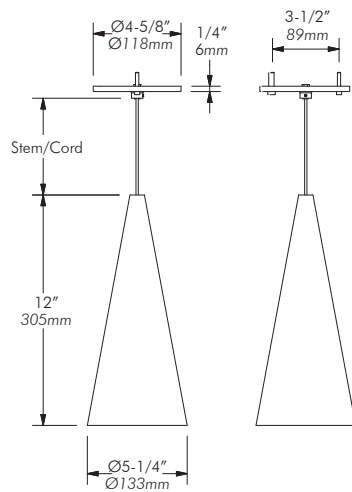

Code	Mount	Pri. Voltage	Cord	Finish
P97	C3	-	-	B
	C3 = Ø4-5/8" x 1/4" canopy	1 = 120V 2 = 277V	C72 = 72" (1829mm) cord CX = custom cord	B = black anodized
			(Note: Only available with Black Cord)	