

Specification Sheet

# LED16W350700E

MP Lighting Emergency Backup Unit




**Features:**

- UL listed NEMA type 1 enclosure
- Minimum operating time: 90min
- LiFePO4 batteries, class 2 output

<b>AC Input Voltage:</b>	100 ~ 277V, 50/60Hz
<b>DC Output Voltage:</b>	11-36V
<b>DC Output Current:</b>	350/700mA
<b>Output Wattage:</b>	16W
<b>Battery Recharging Time:</b>	32hrs (16W 3000mAh)
<b>Test Switch:</b>	Push button with LED indicator
<b>Ambient Temperature:</b>	10-50°C
<b>Weight:</b>	640g/ 1.4lb (emergency + batteries)
<b>Case Material:</b>	Painted steel
<b>Case Weight:</b>	390g/ 0.86lb
<b>Approval:</b>	Damp locations



Dimension:

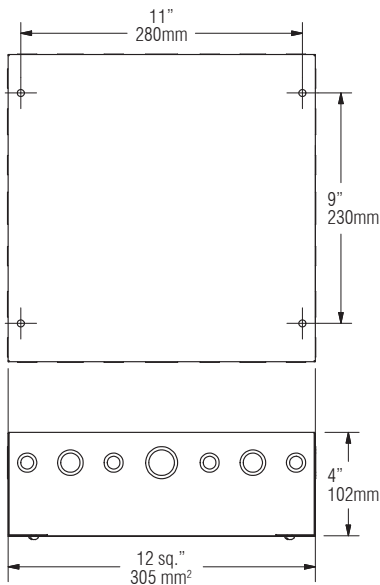

**Note:** Consult factory for maximum wiring length.

**Caution:** Do not install on-off switch at the output (load) side of a constant current LED driver as it will damage the fixture(s).  
Warranty will be void on both driver and fixture(s).

ORDER CODE

**LED16W350700E**

[ Project ]

[ Quantity ]

[ Notes ]

**[✓] MPLIGHTING®**

t 604.708.1184 f 604.708.1185 www.mplighting.com  
16 West 4th Avenue, Vancouver BC, Canada, V5Y 1G3