



LED30W700iZ-01

LED30W700iZ-01B with Enclosure

Features:

- for use in damp and dry locations
- High efficiency
- UL Class 2
- 0-10V dimmable

AC Input Voltage	120~277V, 50/60Hz
DC Output Voltage	2-55V
DC Output Current	700mA Constant
Output Wattage	30W Max
Power Factor	0.90min
Typical Efficiency	84-85%
Short Circuit Protection	Yes
Overload Protection	Yes
Over-voltage Protection	Yes
Dimming Function	0-10V Dimmable
Operating Temperature	-20 ~ 50°C (-4 ~ 122°F)
Case Temperature	90°C (194°F)
Case Material	Aluminum
Weight	285.5g (0.63lb)



* Consult factory for wiring length and details.

Order Code	Enclosure
LED30W700iZ-01	B

Order Information

Type: _____


Project: _____

Modified: _____

Quantity: _____


Notes: _____

Dimension:

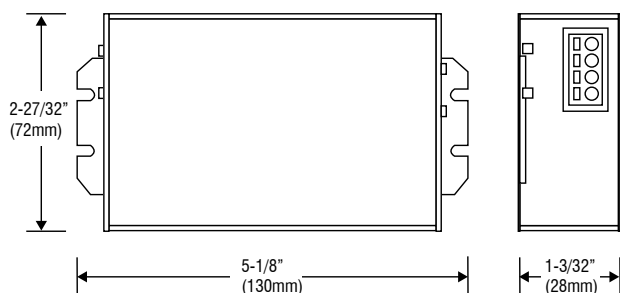

Wiring Diagram

Dimming | For use with 1-10 x 2.5watt LED lighting fixtures (700mA), wired in series.

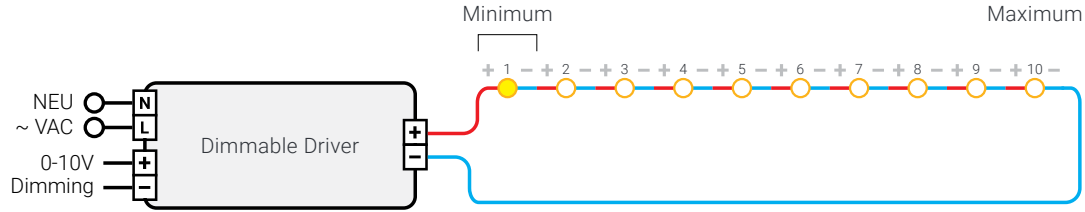

● 700mA LED Lighting Fixture