

TLW120E-SRB

SPEC SHEET




Features:

- Surface mounts to standard junction box.
- Used to power single circuit of system. 100% duty cycle. Integral push button circuit breaker.
- 120V input.
- 12V output.
- Can be used as a power feed for wall mount or sloped ceiling applications, if flexible cord option is chosen.
- **Cord cannot be used as a support.**
- Dry locations. Approved to UL standards by CSA/US.



Note: Consult factory for maximum wiring length.

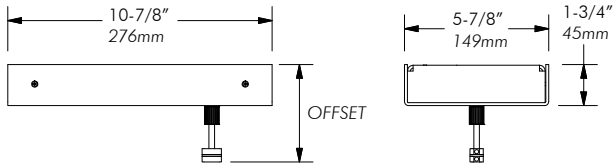

CODE	PRI.VOLTAGE	TYPE	WATTAGE	MOUNT	OFFSET
TLW <i>Surface Mount LED Driver</i>	120 120 = 120V	E E = electronic	150W = 150 watts 300W = 300 watts	SRB SR = single rail black	S4 = 4" (101mm) stem S7 = 7" (178mm) stem SX = custom stem length F15' = 15" (381mm) flexible cord FX' = custom flexible cord

[Project]

[Quantity]

[Notes]

