

CPY044

INTERIOR

Dual Circuit System | Double flexible power canopy

● Dry location



Ordering Information

Clear Form

Date :	<input type="text"/>	Quantity :	<input type="text"/>
Project :	<input type="text"/>	Note :	<input type="text"/>
Type :	<input type="text"/>		<input type="text"/>

Specifications

Double flexible power canopy | Example Code: CPY044-15-MC

Product	Cable	Finish ¹
CPY044	<div><div>15 15" (381mm)</div><div>X custom</div></div>	MC matte chrome

Important Notes

Specification

1. Refer to Appendix or MP Lighting website for track system with different finish options.

Application

Environment	Dry Location approved. IP 20.
Mounting	For Dual Circuit System. Used with remote transformer to power single circuit when a traditional solid power feed isn't feasible. Cable cannot be used as a support. Can also be used as a power feed for wall mounted or sloped ceiling applications.
Compatible Fixtures	L225M, L72, L73, P02, P11, P96, P96L, X01, X06, X31, X42, X45, X51.

Electrical

Electrical	N/A
------------	-----


Construction

Weight	N/A
Material	Brass with electroplated finish.

Mounting Options & Dimensions

Dimensions

Front View

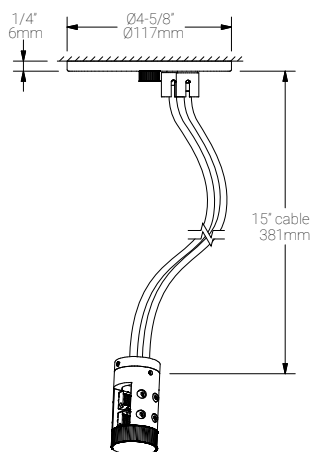

3D View



Appendix



MC matte chrome