
## L131 Installation Instructions

- Connect fixture wires to low voltage wiring (remote LED driver 9W 700mA constant current).
- Align LED housing to electrical box.
- Tighten mounting screws to secure LED housing.
- Attach cover to LED housing by tightening all three screws.

LED9W700 AC Input Voltage: 120V, 60Hz DC Output Current: 700mA Constant

92mm

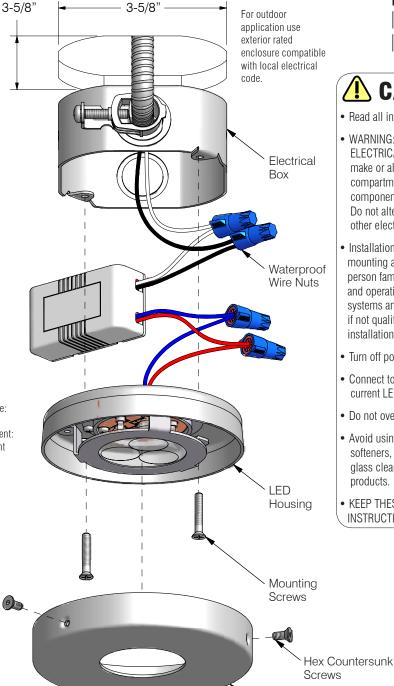

92mm

**CAUTION** 

- · Read all instructions.
- . WARNING: RISK OF FIRE OR ELECTRICAL SHOCK: Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- · Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- · Connect to 9W 700mA constant current LED driver only.
- Do not over tighten screws.
- · Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- KEEP THESE INSTALLATION INSTRUCTIONS.

Cover

**Parts** • LED Unit 1 2 Mounting Screws • Hex Countersunk Screws 3 Waterproof Wire Nuts 4 • LED Driver 9W 700mA 1

## **Maintenance**

Clean using a soft cloth.

[V] MPLIGHTING