


L230-1CT-XS

INTERIOR
Spotlight – Framer | For 1CT track

● Dry location

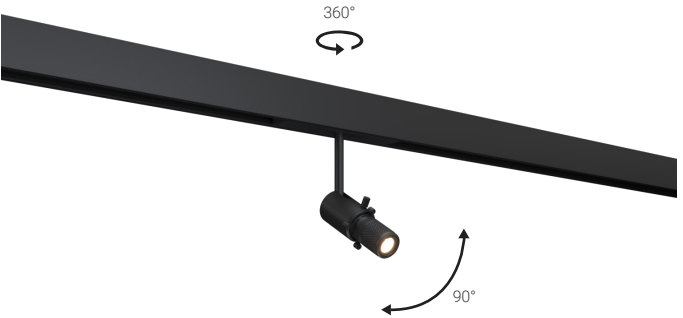

Ordering Information

Clear Form

Date : _____

Project : _____

Type : _____

Quantity : _____

Note : _____

Specifications

Luminaire | Example Code: L230-XS-1CT-8-W30H-2-BA

Product	Canopy ¹	Version	CCT & CRI	Stem Length ²	Finish ³
L230-XS	1CT				
	1CT	1 1W 2 2W	W22H 2200K 90+ W27H 2700K 90+ W30H 3000K 90+ W35H 3500K 90+	2 2" (51mm) X custom length	Aluminum Finishes: BA black anodized

System Components (Ordered Separately)

Remote Driver : _____

* Consult MP Lighting Website or Factory.

Important Notes

Specification

- See pg.3 - for different canopy options and its dimensions.
- 1" (25mm) increments to maximum of 4' (1219mm).
- Refer to Appendix or MP Lighting website for complete look of luminaire with different finish options.


Warranty Notes & Disclaimer

Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.

L230-1CT-XS

INTERIOR
Spotlight – Framer | For 1CT track

● Dry location

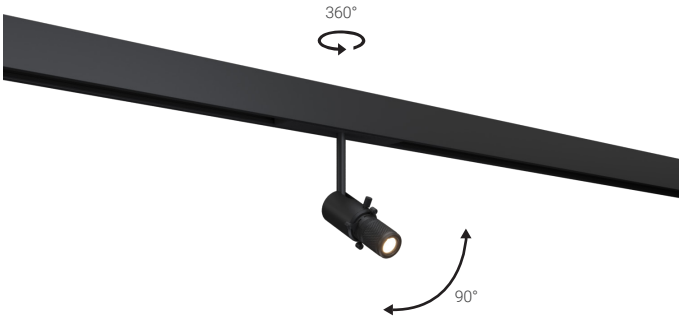

Performance

Wattage	Forward Current	Power Consumption Budget per fixture (including driver)	LED output (Source)	Fixture Output (Delivered)
1W	350mA	1.2W	110 lm	29.1 lm
2W	700mA	2.5W	220 lm	43 lm

Application

Environment	Dry Location approved. IP 20.
Mounting	Mounts to a single circuit track with an adapter (included with fixture).

Electrical

Electrical	Low Voltage 1 Circuit Track: 96W/48V constant voltage Compatible Drivers 12V: 0-10V, ELV dimmable. 48V: 0-10V, DALI dimmable, Casambi
------------	---

Luminaire Construction

LED Light Source	W22H = CCT: 2200K, CRI (Ra): 90+, Colour Consistency: 3SDCM W27H = CCT: 2700K, CRI (Ra): 90+, Colour Consistency: 2SDCM W30H = CCT: 3000K, CRI (Ra): 90+, Colour Consistency: 2SDCM W35H = CCT: 3500K, CRI (Ra): 90+, Colour Consistency: 2SDCM
Weight	N/A
Material	Machined marine-grade aluminum
Supplied with	Standard installation housing
Warranty & LED Life	5 years limited warranty Estimated useful life of LED is 50,000 hours.


Ordered Separately

System Components	Power supplies: remote driver Please consult factory or visit Recommended Drivers for available driver options.
-------------------	---


Mounting Options & Dimensions

LED Fixture Dimensions

Fixture

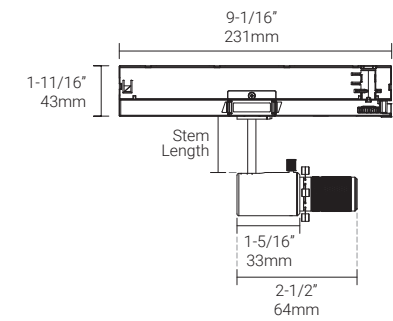

Front View



3D View



Appendix


Aluminum Finishes



BA black anodized

1W, 3000K, 90+ CRI

Polar Candela Distribution



Beam Width: 15°-19°



Illuminance at a Distance


Distance		Center Beam fc	15° Beam Width		19° Beam Width	
3.0ft	0.91m	18.8fc	0.8ft	0.24m	1.0ft	0.30m
6.0ft	1.83m	4.69fc	1.7ft	0.51m	2.0ft	0.60m
9.0ft	2.74m	2.08fc	2.5ft	0.76m	2.9ft	0.88m
12.0ft	3.66m	1.17fc	3.3ft	1.00m	3.9ft	1.18m
15.0ft	4.57m	0.75fc	4.2ft	1.28m	4.9ft	1.49m
18.0ft	5.49m	0.52fc	5.0ft	1.52m	5.9ft	1.79m

Delivered Lumen: 29.1 lm

Tested on 03/23/2026

2W, 3000K, 90+ CRI

Polar Candela Distribution



Beam Width: 15°-19°



Illuminance at a Distance

Distance		Center Beam fc	15° Beam Width		19° Beam Width	
3.0ft	0.91m	32.7fc	0.8ft	0.24m	1.0ft	0.30m
6.0ft	1.83m	8.17fc	1.6ft	0.48m	1.9ft	0.57m
9.0ft	2.74m	3.63fc	2.5ft	0.76m	2.9ft	0.88m
12.0ft	3.66m	2.03fc	3.3ft	1.00m	3.9ft	1.18m
15.0ft	4.57m	1.31fc	4.1ft	1.25m	4.9ft	1.49m
18.0ft	5.49m	0.91fc	4.9ft	1.49m	5.8ft	1.76m

Delivered Lumen: 43 lm

Tested on 03/23/2026