

L620

INTERIOR
Uplight Pendant | For ceilings

● Dry location



Ordering Information

Clear Form

Date :		Quantity :	
Project :		Note :	
Type :			

Specifications

Luminaire | Example Code: L620-C3-4-W30H-W-2-BA

Product	Canopy	Wattage	CCT & CRI ¹	Beam Angle	Stem Length	Finish
L620		4		W		BA
	C3	4 4W	W22S 2200K 80+	W wide flood 120°	1 1' (305mm)	BA black anodized
	C4		W27H 2700K 90+		2 2' (457mm)	
	C20		W30H 3000K 90+		3 3' (305mm)	
	C22		W35H 3500K 90+		4 4' (457mm)	
			W41H 4100K 90+		X custom ²	

System Components (Ordered Separately)

Remote Driver :

* Consult MP Lighting Website or Factory.

Important Notes

Specification

1. Refer to pg.2 - for Light Quality & Colour Consistency details.
2. Custom stem length: minimum 1' (305mm) length and can be increased in 6" (152mm) increments up to a maximum of 4' (1219mm).

Warranty Notes & Disclaimer

Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.

L620

INTERIOR
Uplight Pendant | For ceilings

● Dry location



Performance

Wattage	Forward Current	Power Consumption Budget per fixture (including driver)	LED output (Source)	Fixture Output (Delivered)
4W	350mA	5.2W	440 lm	275.4 lm

Application

Environment	Dry Location approved. IP 40.
Mounting	C3/C4: Mounts to a 4" octagonal box using the mounting canopy. C20: Mounts with friction fit spring clips. Cut-out size: Ø1-1/2" (38mm) C22: Threaded canopy screws to a 4" octagonal box

Electrical

Electrical	Remote LED drivers (120-277V AC input, constant current output): Fixtures to be wired in series.
Control	On/off control Dimming: ELV or 0-10V dimming with appropriate drivers Other options (consult factory): TRIAC/MLV, DMX, DALI, Casambi

Luminaire Construction

LED Light Source	W22S = CCT: 2200K, CRI (Ra): 80+, Colour Consistency: 3SDCM W27H = CCT: 2700K, CRI (Ra): 90+, Colour Consistency: 3SDCM W30H = CCT: 3000K, CRI (Ra): 90+, Colour Consistency: 3SDCM W35H = CCT: 3500K, CRI (Ra): 90+, Colour Consistency: 3SDCM W41H = CCT: 4100K, CRI (Ra): 90+, Colour Consistency: 3SDCM Contact factory for 2SDCM option
Standard Compliance	✓ WELL standard – Feature 58: Color Quality
Material	Fixture: machined aluminum
Supplied with	Comes with a canopy package.
Warranty & LED Life	5 years limited warranty Estimated useful life of LED is 50,000 hours.


Order Separately

System Components	Power supplies: remote driver Please consult factory or visit Recommended Drivers for available driver options.
-------------------	---


Mounting Options & Dimensions

LED Fixture Dimensions | shown with C20 canopy

Fixture shown with C20

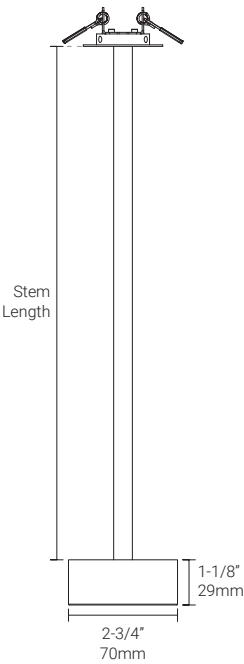


Top View



3D View




Beam

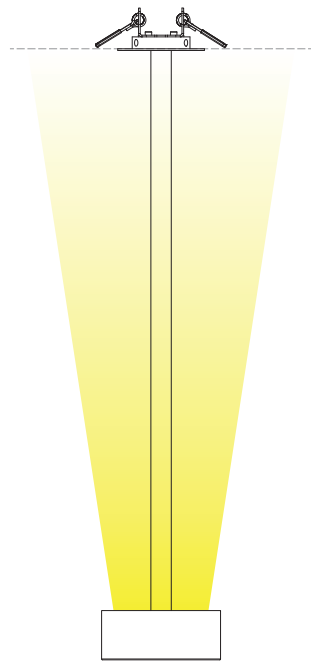


Measurement of Custom Stem Length (X)

C3

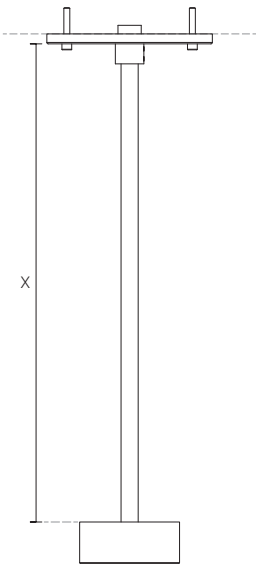


Shortest stem length: 1' (305mm)

C4

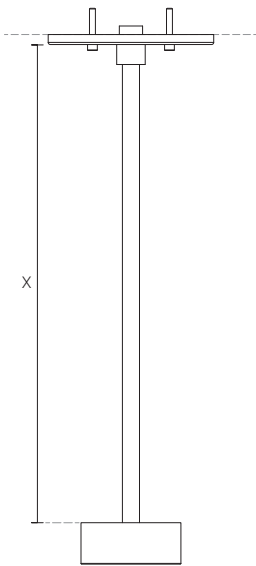


Shortest stem length: 1' (305mm)

C20

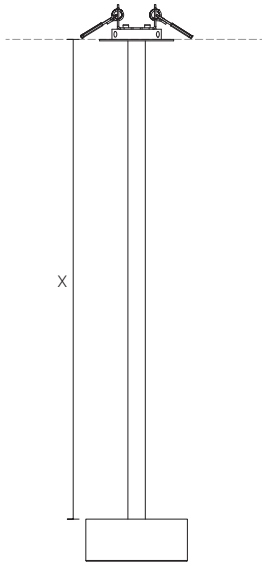


Shortest stem length: 1' (305mm)

C22

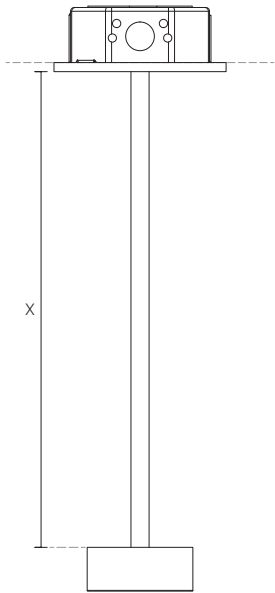


Shortest stem length: 1' (305mm)

Mounting Options & Dimensions

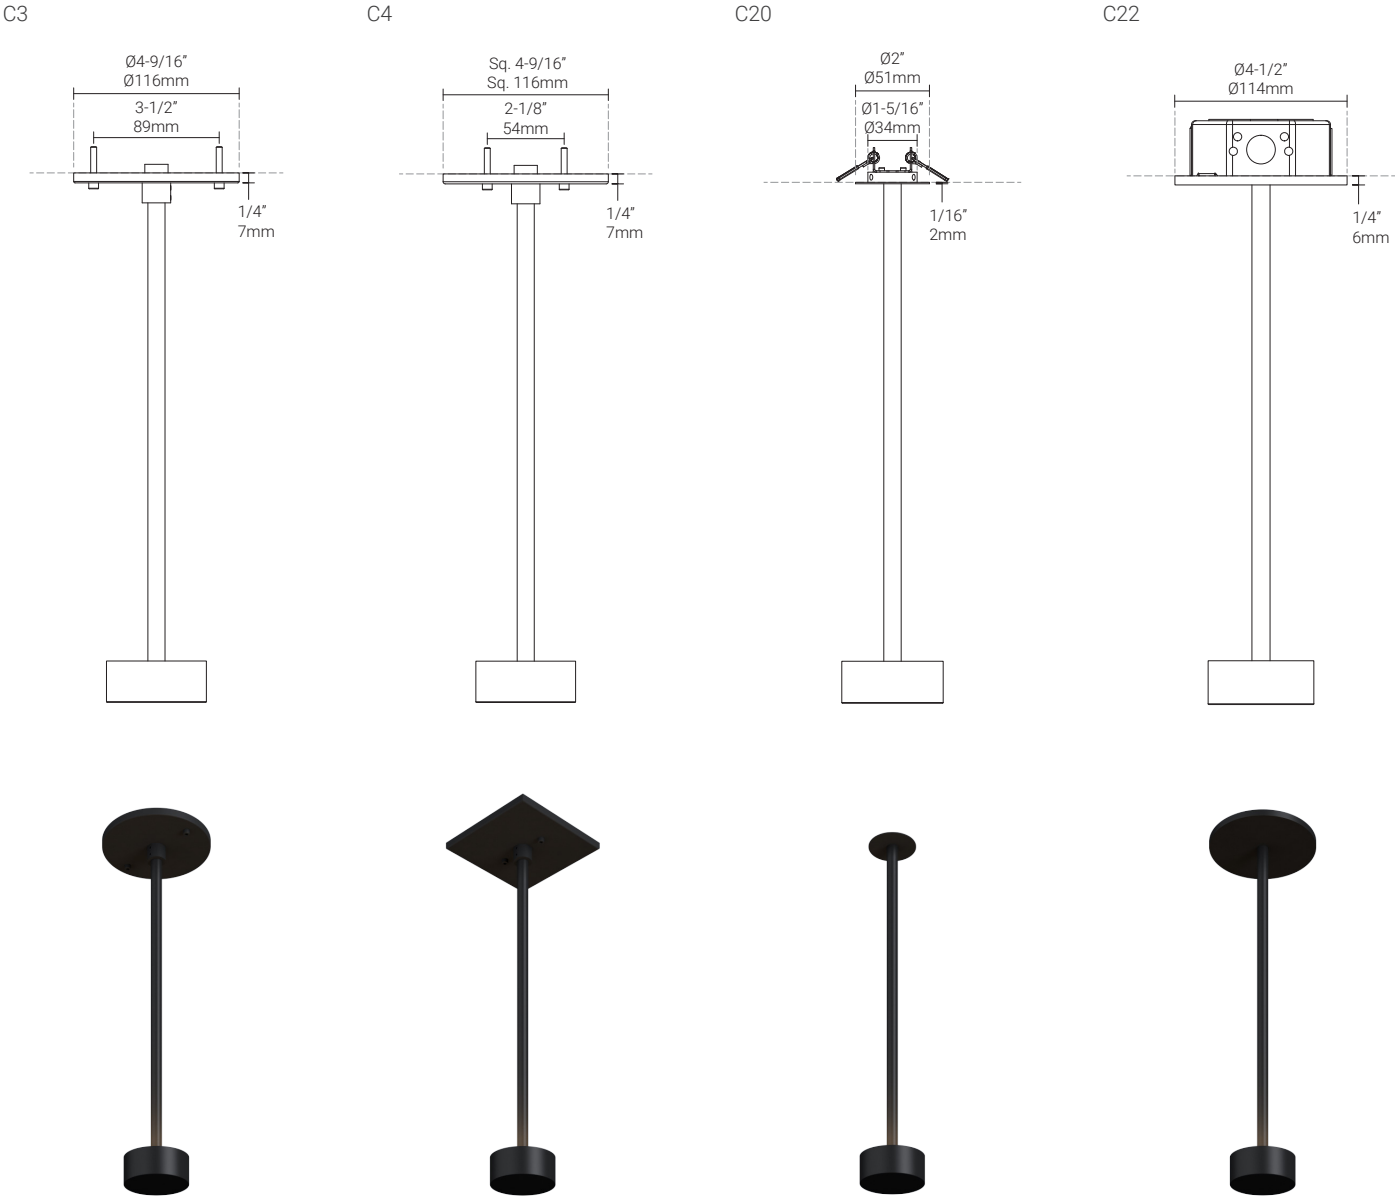


Photometric | 4W, 3000K, 90+ CRI

Polar Candela Distribution



Isofootcandle Plot



Illuminance at a Distance

Distance		Center Beam fc	Beam Width			
0.5ft	0.15m	412fc	1.2ft	0.37m	1.3ft	0.40m
1.0ft	0.30m	103fc	2.5ft	0.76m	2.5ft	0.76m
1.5ft	0.46m	45.8fc	3.7ft	1.13m	3.8ft	1.16m
2.0ft	0.61m	25.8fc	4.9ft	1.49m	5.1ft	1.55m
2.5ft	0.76m	16.5fc	6.2ft	1.89m	6.4ft	1.95m
3.0ft	0.91m	11.5fc	7.4ft	2.26m	7.6ft	2.32m

Delivered Lumen: 275.4 lm
■ Vertical Beam Spread: 102.1°
■ Horizontal Beam Spread: 102.7°

Tested on 07/08/2025

Appendix

Finish Options



BA black anodized
*shown with C20 canopy