

L73C3

Installation Instructions


- 1 Connect primary to driver input wires then fit into electrical box.

For remote driver connect fixture wires to low voltage wiring (remote LED driver 350mA constant current).

- 2 Align canopy to electrical box.

- 3 Tighten screws with Allen Key.

- 4 Push in jack connector and thread cap until secure.

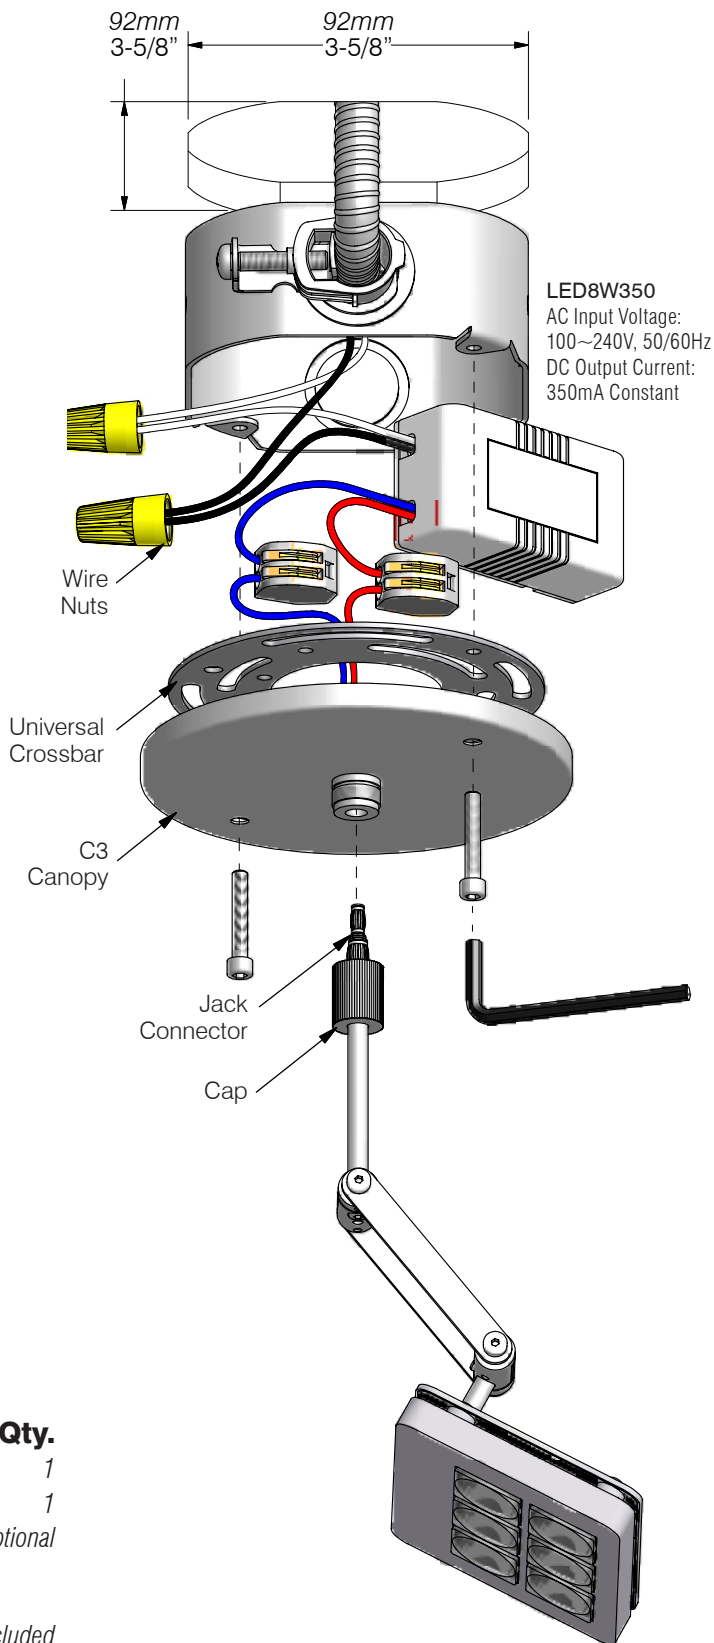

CAUTION

- Read all instructions.
- **WARNING: RISK OF FIRE OR ELECTRICAL SHOCK:** Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Fixture gets very hot. Do not cover. Keep 9" away from combustible materials.
- 350mA constant current driver only.
- Do not spray water on fixture during cleaning. Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- **KEEP THESE INSTALLATION INSTRUCTIONS.**

Parts

	Qty.
• LED unit	1
• C3 Canopy	1
• Universal crossbar	<i>optional</i>

Tools

• Allen key	<i>included</i>
-------------	-----------------

Maintenance

Clean using a soft cloth.

MP LIGHTING

T 604 708 1184 mplighting.com

