

P11DC

INTERIOR

Pendant | For ceilings

● Dry location



Ordering Information

Clear Form

Date : _____

Quantity : _____

Project : _____

Note : _____

Type : _____

Specifications

Luminaire | Example Code: P11-DC-WH-6-C72-MC

Product	Mounting	Shade	Size	Cord ¹	Hardware Finish
P11	DC	WH	6		
	DC dual circuit system		6 6-3/4" (171mm) tall	Cord: C72 72" (1830mm) CX custom length	MC matte chrome BN brushed nickel

System Components (Ordered Separately)

Remote Driver : _____

* Consult MP Lighting Website or Factory.

Important Notes

Specification

1. 72" (1830mm) cord included. Consult factory for custom cord length.

Warranty Notes & Disclaimer

Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.

P11DC

INTERIOR

Pendant | For ceilings

- Dry location



Application

Environment	Dry Location approved. IP 20.
Mounting	Rotatable and easy to position. Designed for use on MP Dual Circuit System (sold separately).

Luminaire Construction

LED Light Source	12V lamp (not included) Recommended: MR16 or BI-PIN
Weight	N/A
Material	Fixture: Opalescent cased glass Hardware: machined marine-grade aluminum
Supplied with	Cord: 72" (1830mm) cord. Consult factory for custom cord length.
Warranty & LED Life	5 years limited warranty Estimated useful life of LED is 50,000 hours.


Ordered Separately

System Components	Power supplies: remote driver Please consult factory or visit Recommended Drivers for available driver options.
-------------------	---

Mounting Options & Dimensions

LED Fixture Dimensions

Fixture

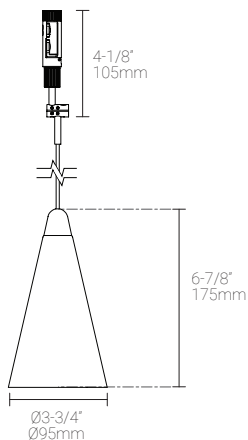

3D View



Beam

