

# P11

## INTERIOR

Pendant | For ceilings

● Dry location



### Ordering Information

Clear Form

Date : \_\_\_\_\_

Quantity : \_\_\_\_\_

Project : \_\_\_\_\_

Note : \_\_\_\_\_

Type : \_\_\_\_\_

### Specifications

Luminaire | Example Code: P11-C20-FR-2-C72-MC

| Product | Canopy <sup>1</sup>          | Shade | Size                  | Cord <sup>2</sup>                                    | Hardware Finish                                    |
|---------|------------------------------|-------|-----------------------|--|--|
| P11     |                              | WH    | 6                     |  |  |
|         | C1<br>C3<br>C4<br>C20<br>C22 |       | 6 6-3/4" (171mm) tall | <b>Cord:</b><br>C72 72" (1830mm)<br>CX custom length | <b>MC</b> matte chrome<br><b>BN</b> brushed nickel |

### System Components (Ordered Separately)

Remote Driver : \_\_\_\_\_

\* Consult MP Lighting Website or Factory.

### Important Notes

#### Specification

- See pg.3-5 - for different canopy options and its dimensions.
- 72" (1830mm) cord included. Consult factory for custom cord length.

#### Warranty Notes & Disclaimer

Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.

# P11

## INTERIOR

Pendant | For ceilings

- Dry location



### Application

|             |  |
|-------------|--|
| Environment | Dry Location approved. IP 20.  |
| Mounting    | <b>C1/C3/C4:</b> Mounts to a 4" octagonal box using the mounting canopy. Transformer included.<br><b>C20:</b> Recess mounts to a surface with coil spring clips.<br><b>C22:</b> Threaded to a 4" octagonal box with the adapter & bracket. |

### Electrical

|                |     |
|----------------|-----|
| Power Supplies | N/A |
| Control        | N/A |

### Luminaire Construction

|                     |   |
|---------------------|---|
| LED Light Source    | 12V lamp (not included)<br><b>Recommended:</b> MR16 or BI-PIN   |
| Weight              | N/A   |
| Material            | <b>Fixture:</b> Opalescent cased glass<br><b>Hardware:</b> machined marine-grade aluminum   |
| Supplied with       | <b>Standard installation housing:</b> Comes with a canopy, a universal crossbar, two screws (depending on selected canopy option), and an allen key.<br><b>Cord:</b> 72" (1830mm) cord. Consult factory for custom cord length. |
| Warranty & LED Life | 5 years limited warranty<br>Estimated useful life of LED is 50,000 hours.   |


### Ordered Separately

|                   |   |
|-------------------|---|
| System Components | <b>Power supplies:</b> remote driver<br>Please consult factory or visit <a href="#">Recommended Drivers</a> for available driver options. |
|-------------------|---|

Mounting Options & Dimensions

LED Fixture Dimensions (shown with C1 canopy)


Fixture

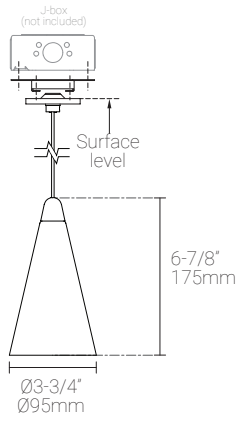

3D View



Beam

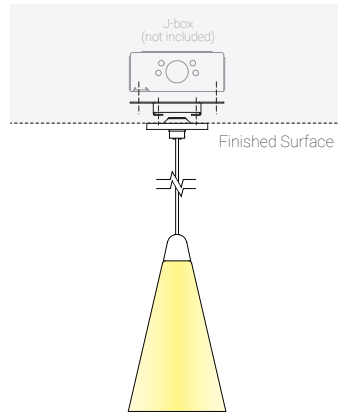

Canopy Images, Dimensions & Measurement of Custom Cord/Stem Length (X)

C1



C3



C4



C20



C22

