[MP LIGHTING]

# P96DC

**INTERIOR**

Pendant | For ceilings

- Dry location

## Ordering Information

Clear Form

Date : _____

Project : _____

Type : _____

Quantity : _____

Note : _____

## Specifications

**Luminaire |** Example Code: P96-DC-S-C72-MA

| Product | Mounting | Shade Size | Cord/Stem Length [1] | Finish [2] |
|---|---|---|---|---|
| **P96** | **DC** | **S** | | |
| | **DC** dual circuit system | **S** small: 6-3/8" (162mm) | **Cord:**<br>**C72** 72" (1830mm)<br>**CX** custom length<br><br>**Stem:**<br>**S6** 6" (152mm)<br>**SX** custom length | **Aluminum Finishes:**<br>**MA** matte clear anodized |

**System Components (Ordered Separately)**

Remote Driver : _____

* Consult MP Lighting Website or Factory.

## Important Notes

Specification

1. *72" (1830mm) cord or 6" (152mm) stem is included. Consult factory for custom cord/stem length.*
2. *Refer to Appendix or MP Lighting website for complete look of luminaire with different finish options.*

Warranty Notes & Disclaimer

*Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.*

# P96DC

**INTERIOR**
Pendant | For ceilings

- Dry location

## Application

| | |
|---|---|
| Environment | Dry Location approved. IP 20. |
| Mounting | Rotatable and easy to position. Designed for use on MP Dual Circuit System (sold separately). |

## Luminaire Construction

| | |
|---|---|
| LED Light Source | 12V lamp (not included)<br>**Recommended:** MR16 |
| Weight | 1.87lbs (0.85kg) |
| Material | **Fixture & Hardware**: machined marine-grade aluminum |
| Supplied with | **Standard installation housing:** Comes with a canopy, a universal crossbar, two screws (depending on selected canopy option), and an allen key.<br>**Cord/stem:** 6' (1830mm) cord or 6" (152mm) stem is included. Consult factory for custom cord/stem length. |
| Warranty & LED Life | 5 years limited warranty<br>Estimated useful life of LED is 50,000 hours. |

## Ordered Separately

| | |
|---|---|
| System Components | **Power supplies:** remote driver<br>Please consult factory or visit Recommended Drivers for available driver options. |

## Mounting Options & Dimensions

**LED Fixture Dimensions**

Fixture

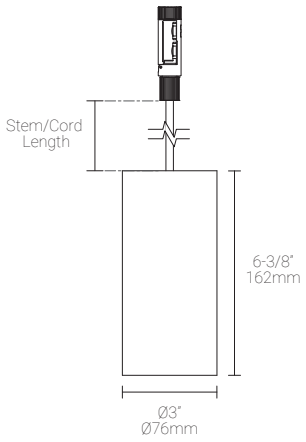


3D View

Beam