


# SLD-DC

**Features:**

- Surface mounts to standard junction box.
- Used to power single circuit of system. 100% duty cycle. Integral push button circuit breaker.
- 120V-277V input.
- 15V or 24V output.
- Comes with 15V or 24V LED driver power system (please specify). Also can be used as a power feed for wall mount or sloped ceiling applications, if flexible cord option is chosen.
- Cord cannot be used as a support.
- Consult factory for wiring length and details.
- Dry locations. Approved to UL standards by CSA/US.



Dimension:

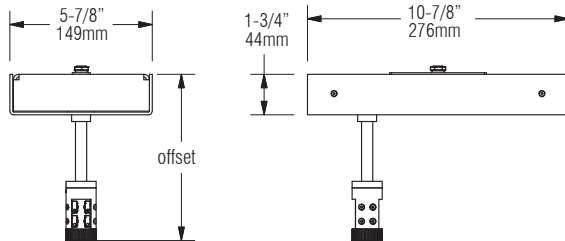

Type:

Project:

Modified:

Quantity:

Notes:

Code	Mount	Wattage	Output Voltage	Dimming	Offset	Finish
<b>SLD</b>	<b>DC</b>	<b>100W</b>				<b>MC</b>

**DC** = dual circuit rail

**100W** = 100 watts

**15** = 15V DC  
**24** = 24V DC

**D** = dimmable  
**N** = non-dimmable

**S12** = 12" (305mm)  
**SX** = custom  
**F15\*** = 15" (381mm) flexible cord  
**FX\*** = custom flexible cord

**MC** = matte chrome

*\*For sloped ceiling applications.*