

SLD-SRB

SPEC SHEET




Features:

- Surface mounts to standard junction box.
- Used to power single circuit of system. 100% duty cycle. Integral push button circuit breaker.
- 120V input.
- 12V output (60W)
- Comes with Dimmable LED driver power system (please specify). Also can be used as a power feed for wall mount or sloped ceiling applications, if flexible cord option is chosen.
- **Cord cannot be used as a support.**
- Dry locations. Approved to UL standards by CSA/US.



Note: Consult factory for maximum wiring length.

Dimension: shown with 4" (101mm) stem

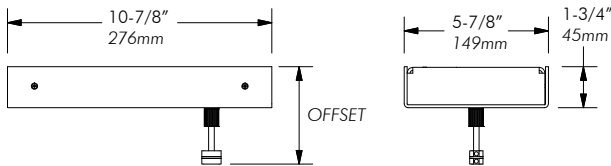

CODE	MOUNT	WATTAGE	DIMMING	OFFSET
SLD	SRB	60W		
Surface Mount LED Driver	SRB = single rail black	60W = 60 watts (12V)	Z = 0-10V dimming P = ELV dimming	S4 = 4" (101mm) stem

[Project]

[Quantity]

[Notes]

