

Single Rail Surface Mount LED Driver

SLD-SR


SPEC SHEET

Features:

- Surface mounts to standard junction box.
- Used to power single circuit of system. 100% duty cycle. Integral push button circuit breaker.
- 120V input.
- Comes with Dimmable LED driver power system (please specify), ELV dimming only. Also can be used as a power feed for wall mount or sloped ceiling applications, if flexible cord option is chosen.
- **Cord cannot be used as a support.**
- Dry locations. Approved to UL standards by CSA/US.



Note: Consult factory for maximum wiring length.

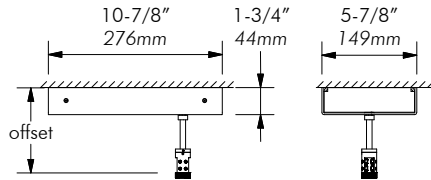

CODE	MOUNT	WATTAGE	OFFSET	FINISH
SLD	SR			
Surface Mount LED Driver	SR = single rail	60W = 60 watts (12V)	S12 = 12" (305mm) stem SX = custom stem length F15' = 15" (381mm) flexible cord FX ¹ = custom flexible cord	MC = matte chrome

¹For sloped ceiling applications.

[Project]

[Quantity]

[Notes]

