

# TLW120E150-CS15CF

Cable System Electronic Surface Mount Transformer




**Material:** Steel case and copper tube with electroplated finish

**Mounting:** Surface mounts to standard J-box.

**Electrical:** 100% Duty cycle. Auto reset circuit protection. Can only be used on MP cable system. Flexible power feed - cannot be used as cable support. Can be dimmed using electronic low voltage dimmers (i.e. Lutron Diva).

<b>AC Input Voltage:</b>	120V, 60Hz
<b>DC Output Voltage:</b>	12V
<b>Output Wattage:</b>	150W Max. (TLW120E150-CS15CF)
<b>Maximum Load:</b>	Depends on wattage of fixture
<b>Power Factor:</b>	95% Min
<b>Typical Efficiency:</b>	80%
<b>Short Circuit Protection:</b>	Yes
<b>Overload Protection:</b>	Yes
<b>Operating Temperature:</b>	-10~50°C (14~122°F)
<b>Maximum Case Temperature:</b>	65°C (149°F)
<b>Humidity (Non-Condensing):</b>	5%~95%
<b>Weight:</b>	3lb / 1.4kg
<b>Approval:</b>	Dry locations. Approved to UL standards by CSA/US.

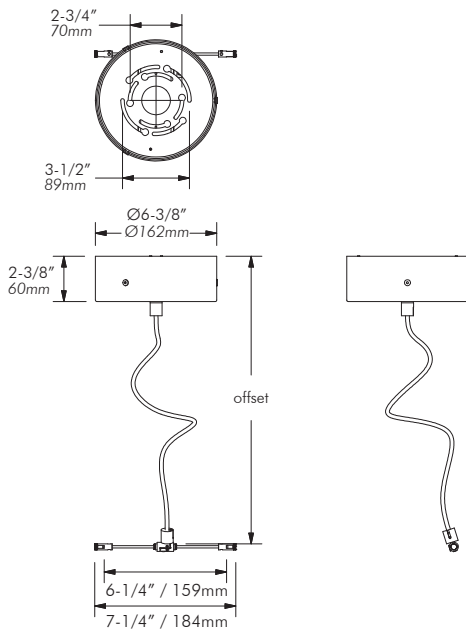

Type:  
Project:  
  
Modified:  
  
Quantity:  
Notes:

CODE	WATTAGE	MOUNT	OFFSET	CANOPY	FINISH
TLW120E	- 150	CS		CF	-
	150 = 150W	CS = cable system	15 = 15" (381mm) X = custom length	CF = circular canopy with flexible power feed	MC = matte chrome BN = brushed nickel