

# P81LDC

## Installation Instructions

- 1** Unscrew connector cap and open connector.
- 2** Place fixture on rail in desired location.
- 3** Squeeze connector together and tighten cap.



### DC Jack Connector

To remove fixture without taking DC connector off rail, unscrew fixture cap and pull out jack.

*\*for details see DC system overview or DC connector instructions.*


### Mount Glass Shade

- 1** Install glass shade by lifting it over the socket and cord assembly. Carefully feed each hanger screw through the shade into the corresponding hole in the socket holder. To ensure the pendant hangs plumb, tighten each screw equally. **DO NOT OVER TIGHTEN SCREWS** (this may chip the edges of the glass).

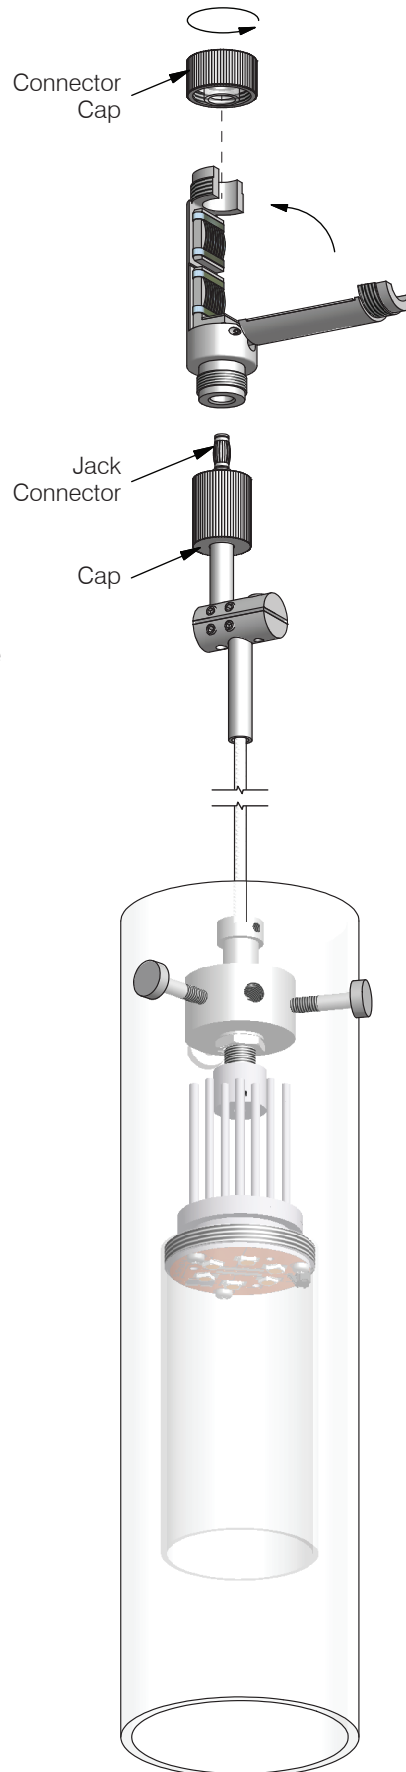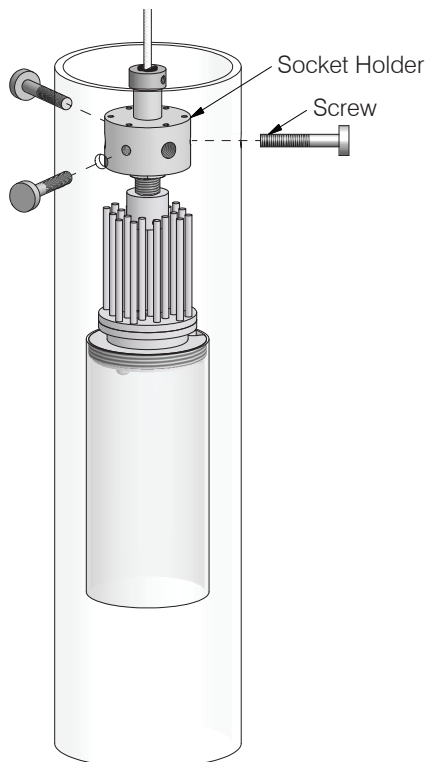

### **!** CAUTION

- Read all instructions.
- **WARNING: RISK OF FIRE OR ELECTRICAL SHOCK:** Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Do not move fixture along rail if power is on.
- Ensure connection is tight to prevent short circuit from occurring.
- Do not over tighten screws.
- Do not remove setscrew or wire from connector
- Do not force rails into connector, this may cause plastic inserts inside connector to come apart, fixture may short if this occurs, reinsert before tightening connector.
- Do not spray water on fixture during cleaning. Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- **KEEP THESE INSTALLATION INSTRUCTIONS.**



**Note:** DC rail has separate neutral which enables the connector to be mounted on either side of rail depending on which circuit is desired. Two screws indicate the side of the connector with power.

**MPLIGHTING®**

t1.877.708.1184 f604.708.1185 www.mplighting.com  
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada