

# MLED32V350Z

## CONSTANT CURRENT

20W, 350mA, 0-10V dimmable, 10-32V DC Input

- Wet, Damp, and Dry location



### Ordering Information

Clear Form

Date :	_____	Quantity :	_____
Project :	_____	Note :	_____
Type :	_____		_____

### Specifications

LED Driver | Example Code: MLED32V350Z

Product

**MLED32V350Z**

### Important Notes

#### Warranty Notes & Disclaimer



MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make improvements and innovations to any of our products. Consult MP Lighting website for further details.

- Do not install on-off switch at the output (load) side of a constant current LED driver as it will damage the fixture(s) and will void the warranty on both driver and fixture(s).
- Fixtures must be wired as per MP Lighting's instruction (series wiring for constant current driver and parallel wiring for constant voltage drivers.) Failures due to improper installation will void warranty.

### Dimensions

Driver

Driver | Side View

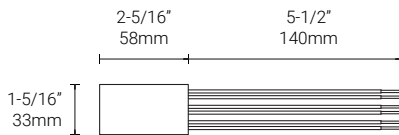

# MLED32V350Z

## CONSTANT CURRENT

20W, 350mA, 0-10V dimmable, 10-32V DC Input

- Wet, Damp, and Dry location



### Performance

Input	Output	Efficiency
<b>Voltage:</b> 10-32V DC	<b>Voltage:</b> 6-48V DC	<b>Power Factor:</b> 0.95 maximum.
	<b>Current:</b> 350mA Constant	<b>Typical Efficiency:</b> 90%
	<b>Wattage:</b> 20W maximum	

### Controls

Dimming Protocols	0-10V dimmable. Can be used in both dimming & non-dimming systems.
Dimming Range	5%~100%

### Recommended Load

Driver Load Used for 1-8 1W LED fixtures with the load below:

Systems		Load	
Input Voltage	System Dimming Option	Minimum	Maximum
10-32V only	Dimming	1	8
	Non- Dimming	1	8

Driver Load Used for 1-2 7.5W LED fixtures with the load below:

Systems		Load	
Input Voltage	System Dimming Option	Minimum	Maximum
10-32V only	Dimming	1	2
	Non- Dimming	1	2

### Application


Environments	Dry Location approved.
Ambient Temperature	-40°C - 80°C (-40°F - 176°F) minimum/maximum.
Case Temperature	125°C (257°F) maximum.
Driver Protection	Short Circuit, Overload & Over-voltage protection.
Weight	45g (0.10lbs).
Case Material	Plastic.

### Ordered Separately

System Components **Enclosure Boxes:** Please consult factory or visit [Enclosure Boxes](#) for available enclosure box options.


Wiring Diagram

Dimming | For use with 1-8 x 1W LED lighting fixtures (350mA), wired in series

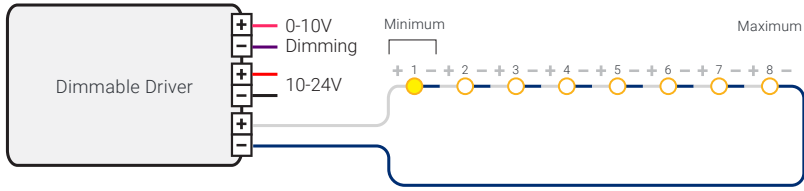

● 350mA LED Lighting Fixture

Dimming | For use with 1-2 x 7.5W LED lighting fixtures (350mA), wired in series

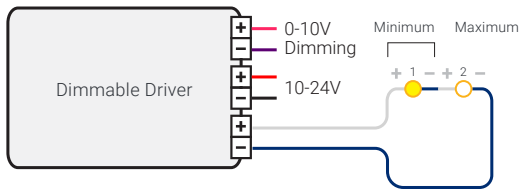

● 350mA LED Lighting Fixture